


Apollo Seiko Ltd.
Head office / Factory :
2271-7 Jinba, Gotenba-shi, Shizuoka, Japan
TEL:+81- (0) 550-88-2828 FAX:+81 (0) 550-88-2830
E-mail: sales@apolloseiko.co.jp

Agent

* These specification may be changed for improvement without prior notice.

URL: <http://www.apolloseiko.co.jp>

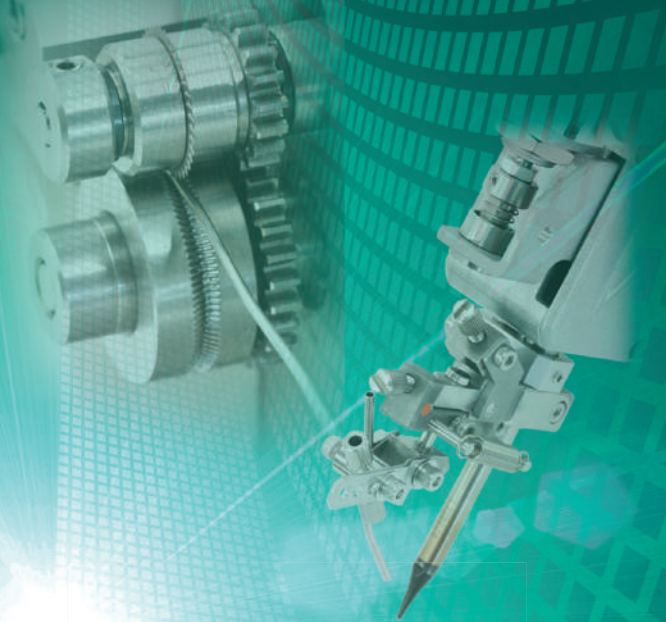

APOLLO
APOLLO SEIKO
Your Automated Soldering Partner
APOLLO SEIKO LTD.
PRODUCT CATALOG 2015-2016



Apollo Seiko is Your Automated Soldering Partner.

Apollo Seiko is the world's first inventor of
"Automated Soldering Systems".

Since our start up in 1969,
we are committed to research and development of advanced soldering
solutions and building strong partnerships with our customers.





To Continue being Your Automated Soldering Partner

We have over 45 years of experience and results as a designer & builder of the soldering robot.

Our Apollo Seiko global family network can provide professional technical service and friendly support to our customer.

Koichi Hirosaki
CEO
Apollo Seiko Ltd.

Apollo Seiko Global Family



Walther Heymans
NETHERLANDS



Scott Wang
TAIWAN



Yeong Sik Cho
KOREA



Rick Schiffer
U.S.A.



Takashi Saito
THAILAND








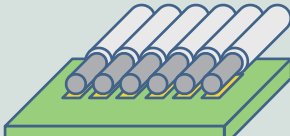


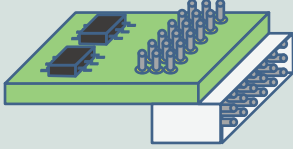
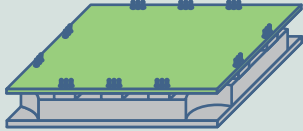

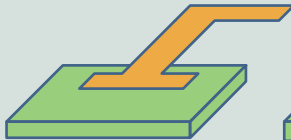
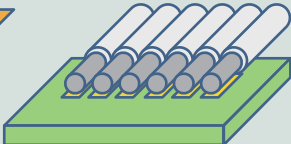


Alex Sim
SINGAPORE



James Lin
CHINA

Selective Soldering Technologies

Method	Application Example	
<p>Substitution from manual soldering</p> <p>Iron</p> 	 <p>Harness</p>	 <p>Camera Module</p>
<p>Precise Solder Amount</p> <p>Sleeve</p> 	 <p>Insert Molded Product + PCB</p>	 <p>Coil Terminal Wiring</p>
<p>Non-contact soldering</p> <p>Laser</p> 	 <p>Board + Micro Cable</p>	 <p>Camera Module</p>
<p>Energy saving & Eco solder bath</p> <p>Selective Flow</p> 	 <p>Multi-row Connector</p>	 <p>Intelligent Power Module</p>
<p>A variety of applications</p> <p>Alternative methods</p> 	 <p>FPC + PC Board</p>	 <p>PC Board + Micro Cable</p>



Capacitor + Terminal


P7~

Manual Soldering

- Manual Soldering Station
- Solder Wire Feeder



P32~



Perfect Back Fillet


P21~

Soldering Peripheral Equipment

- Dispensing
- Screw tightening
- Board cutting etc.



P37~



Fine Pitch and Micro Soldering


P23~

Options

- Iron Tip Cleaner
- Fume Extractor etc.



P39~

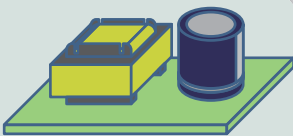

High Heat Capacity Parts


P23~

Consumable Items

- Solder Wire
- Solder Wire Feeding Tube
- Iron Cartridge etc.



P45~

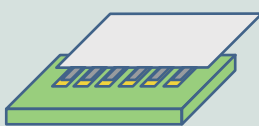


FFC Soldering

P30~

Introduction Flow of Automated Soldering

We offer Automated Soldering Consulting in order to provide a complete solution from product introduction to installation support.

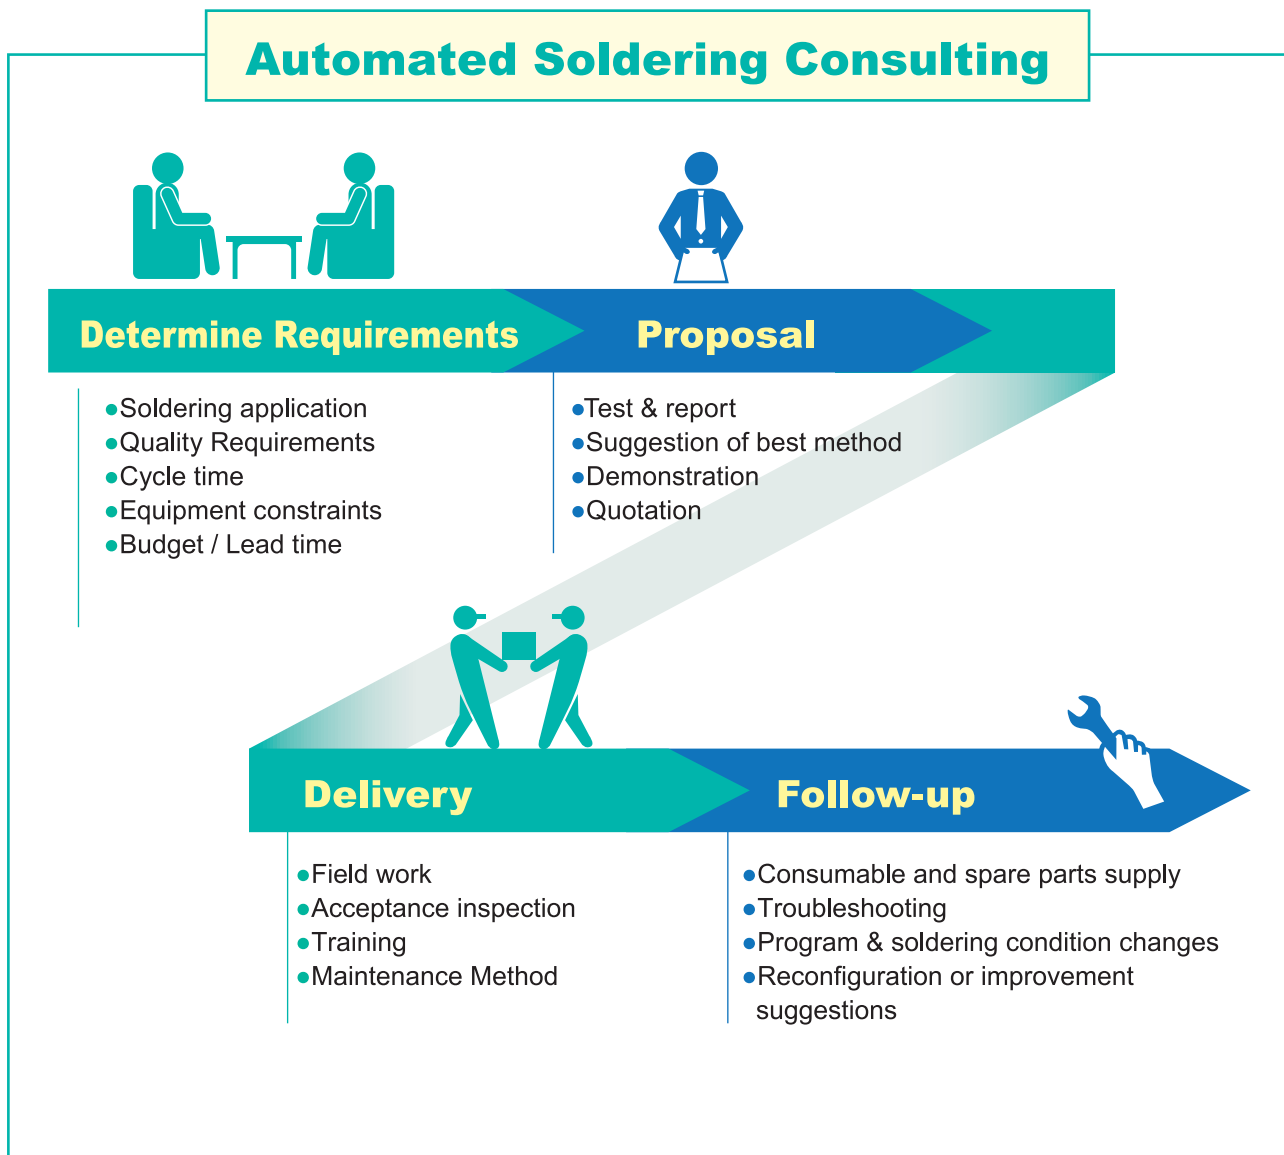

We are always Your Automated Soldering Partner.



Advantage of Apollo Seiko's iron soldering

Iron Cartridge Page 47~

- Just 8 seconds to exchange iron cartridge without tools.
- The iron tip always returns to the exact same position after replacement.
- Direct heating system conducts the heat quickly to the iron tip.
- You can select the most suitable tip profile from a wide variety of iron cartridges.
- Built-in nitrogen nozzle iron cartridge is available.




Exclusive high-capacity heater

Temperature sensor embedded as close to the Apex of the tip as possible

Iron Unit Page 20~

Micro Adjust Unit

This feature allows for fast, easy adjustment of the solder wire supply position up / down & left / right.

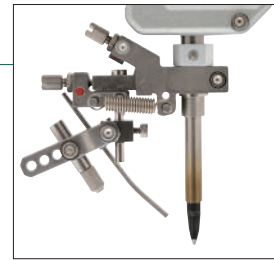

Changeable Second Solder Feeding Position

The solder wire is fed under the iron tip to prolong tip plating life and prevent the flux from burning off too rapidly. Upon tip extension, the solder wire contacts the tip thus melting the solder directly onto the solder pad and transferring thermal energy very rapidly. The solder feeding position can be set by programming the Z axis to raise or lower the solder wire location to feed directly into the desired area of the solder joint. This allows the solder to spread evenly around the joint for optimal results

Roulette Cutting Blade (ZSB) Page 39~

No.1 Selected Option

The ZSB was designed to prevent solder balls and flux spattering. It reduces product defects, inspection process and reworking time due to the lack of solder ball formation.



Low-voltage, Low-power Consumption and Multi-power

Apollo Seiko's soldering robot is designed with safe, low-voltage and eco-friendly low-power consumption. The multiple power input has been designed for world-wide factory use and easy transfer to oversea facilities.



L-CAT NEO

Next generation soldering robot

This next generation robot has all the functions necessary for selective soldering built into the machine. The L-CAT NEO has been designed for either an in-line or lean manufacturing process.

A data management plan is available for PC, IPAD, Android & PC tablet communications & teaching. Fiducial recognition & tip position alignment can easily be added to ensure proper tip & PCB alignment to guarantee positional accuracy and to ensure the highest quality soldering results.




Accessories

ZSB Feeder



Air Blow Cleaners




Rotary Cleaners



Tip Position Correction Unit



Fume Extractors



Pre-Heater



High-Quality Portable Video Recorder



Tip Thermometer



“The Robot Designed Exclusively for Soldering” Designed & Built by Apollo Seiko

All Required Functions Built Into the L-CAT NEO

We have over 40 years of experience & results as a designer & builder of soldering robots. Our application knowledge and strategic customer partnerships have positioned Apollo Seiko as the market leader. Together with our engineering team and customer input, we have developed the L-CAT NEO to be utilized exclusively for selective robotic soldering.

Exclusive Gantry Type Soldering Robot

All 4 axes (X, Y, Z & R) are suspended from the gantry which allows for simple fixture design and easy integration into conveyor, manual load & dual shuttle environments. Fixture size and weight & cable/wire harness lengths are not an issue as the fixture remains stationary on the robot base table.

Programming Freedom & Flexibility

Normally soldering robots have a fixed sequence to program solder parameters. However, the L-CAT NEO has a very flexible solder sequence that can be customized to meet the needs of your specific application. The L-CAT NEO offers flexibility of parameter sequencing to provide solutions for high thermal energy, fine pitch devices, large & small lead combinations etc. The soldering parameters (solder feed amount, feeding speed & temperature) can be arranged in a sequence that provides a solution for each particular soldering challenge.

Robot Communication – A Simple Matter of Choice & Functionality

You can choose your own device when it comes to communication & teaching of the L-CAT NEO, such as an IPAD, Android device or PC tablet. This capability has set a new standard for the next generation of selective soldering robots.



PC Software Screen Example

Available for Windows 7, & Windows 8 (32 bit & 64 bit)
Can manage multiple robots via Ethernet
Robot status data-logging – saved as .CSV file type
Teaching data editing and file transfer is very simple

L-CAT NEO

L-CAT NEO Specifications

Type	L-CAT NEO4330	L-CAT NEO4430	L-CAT NEO4530
Drive Method	Stepping Motor		
Encoder	4-axes Applicable		
Resolution	X,Y,Z Axes	0.01mm	
	R Axis	0.1°	
Operation Range	X,Y Axes	300× 300mm	400× 300mm
	Z Axis	60mm	
	R Axis	± 180°	
Portable weight	6 Kg		
Axis Speed	X,Y Axes	Max : 800mm/sec , Min : 0.1mm/sec	
	Z Axis	Max : 320mm/sec , Min : 3.2mm/sec	
	R Axis	Max : ± 800° /sec , Min : 8° /sec	
Repeatability	X,Y,Z Axes	± 0.01mm	
	R Axis	± 0.02°	
Teaching Method	Remote Teaching (JOG)		
	Manual Data Input (MDI)		
External Input / Output	Input : 39 Output : 39		
Program Capacity	511 programs		
Memory Capacity	500,000 point		
Setting Temperature	0 ~ 500℃		
Solder Feeding Speed	1.0mm/sec ~ 50.0mm/sec		
Solder Feeding Amount Resolution	0.1mm		
Solder Diameter	Using ZSB Feeder	φ 0.4 mm ~ φ 1.0mm (Option: φ 0.3、 1.2、 1.6mm)	
	Using Normal Feeder	φ 0.3mm ~ φ 1.6mm	
Heater Capacity	130W (Option: 200W Available)		
Nitrogen Generator	Standard Equipment to Robot inside With Digital Flow meter		
Display Language	English, Chinese, Korean, Japanese, Spanish		
Power Source	AC94V ~ 260V (Single Phase)		

L-CAT EVO

Desktop or In-Line Soldering Robot

For in-line and desktop use, the L-CAT EVO specialized soldering robot has innovated features and has evolved from proven technology. Defining the soldering parameters is fast and simple due to the intuitive interface of the EVO robot. All the cables are internally routed via the Z-axis head and will not tangle during rotation. The L-CAT EVO has a capacity of 100 programs and 100,000 points to meet virtually all PCB soldering requirements. The soldering temperature can be customized inside each of the 300 soldering profiles to provide optimal quality and cycle time. X & Y motors with high accuracy rotary encoders achieve 0.01mm resolution (repeatability 0.02mm) with a maximum speed 750 mm/sec.



L-CAT EVO Specifications

L-CAT-EVO4330 Operation Range	X=300mm, Y=300mm Z=60mm, R=340°
L-CAT-EVO4430 Operation Range	X=400mm, Y=300mm Z=60mm, R=340°
L-CAT-EVO4540 Operation Range	X=500mm, Y=400mm Z=60mm, R=340°
Soldering Condition	198 Conditions
Soldering Step	21 Step
Setting Temperature	TEM:0~500°C
Solder Feeding Speed	S+ / S-:1~50.0 (mm/sec.)
Timer	TIM:0.1~99.9 (sec.)
Iron Up/Down	CY:ON / OFF
Solder Diameter	φ0.4mm~φ1.6mm
Heater Capacity	130W (Option:200W available)


Drive Method	5 Phase stepping motor with X,Y Axes
X, Y Axes	750mm / sec.
Z Axis	150mm / sec.
R Axis	360° / sec.
Teaching Method	Remote teaching (JOG) Manual Data Input (MDI)
Program Capacity	100 program
Memory Capacity	100,000 point
External Input / Output	Input:5 Output:7
External Interface	RS232C
Solder Feeding Amount Resolution	0.01mm
Repeatability	±0.02mm
Portable Weight	3kg
Weight	50kg
Power Source	AC94V~260V (Single Phase)
Air Supply	0.4~0.5 MPa (Dry & Clean air)
Power Consumption	MAX330VA (including heater)
Power Consumption	Standard equipment

Accessories

ZSB Feeder



Air Blow Cleaners



Rotary Cleaners




Fume Extractors



Pre-Heater



Micro Monitoring Camera



High-Quality Portable Video Recorder



Tip Thermometer



J-CAT COMET

Desktop Soldering Robot

This soldering robot is available in four work envelope sizes (200mm ~500mm work areas). The PC software is very simple and user friendly and allows for program customization. The COMET controller can store 500 solder profiles. The robot's 255 X-Y programs (30,000 total points), provides endless flexibility.

500 Soldering Conditions

500 soldering conditions can be programmed to meet various soldering requirements for many soldering points. The solder feed / reverse amount is adjustable in 0.1mm increments and the pre-heat / heat time is also adjustable in 0.1 second increments.

High Speed Soldering

The specialized program achieves a much shorter tact/cycle time. Shortening of the tact/cycle time is a big challenge in a production process. However, the J-CAT COMET has been designed to minimize cycle time by using customized programs.

Excellent Temperature Control and Auto Tuning

The excellent temperature controller equipped J-CAT COMET, raises the iron temperature from room temperature to 350 degrees in approximately 10 seconds. Automatic temperature calibration function improves iron tip performance and stability. High precision thermocouple is built into the Apex of the iron tip so minimal temperature drop can be detected and recovered very quickly.




Accessories


ZSB Feeder




Air Blow Cleaners



Rotary Cleaners



Fume Extractors



Nitrogen Generator




Tip Position Correction Unit



Pre-Heater



Micro Monitoring Camera



High-Quality Portable Video Recorder



Position Calibration Camera



Tip Thermometer



J-CAT COMET Line Up



J-CAT200 COMET



J-CAT300 COMET



J-CAT400 COMET

J-CAT COMET Specifications

Type		J-CAT200COMET	J-CAT300COMET	J-CAT400COMET
Drive Method		5-phase Stepping Motor		
Encoder		4-axes Applicable		
Resolution	X,Y,Z Axes	0.01mm		
	R Axis	0.08°		
Operation Range	X,Y Axes	200×200mm	300×320mm	400×400mm
	Z Axis	50mm	100mm	100mm
	R Axis	± 360°		
Portable Weight		7.0Kg	11.0Kg	
Maximum Speed	X,Y Axes	700mm/sec	800mm/sec	
	Z Axis	250mm/sec	320mm/sec	
	R Axis	600°/sec	800° /sec	
Repeatability	X,Y,Z Axes	± 0.01mm		
	R Axis	± 0.008°		
Teaching Method		Remote Teaching (JOG)		
		Manual Data Input (MDI)		
External Input / Output		Input : 16 Output : 16		
Program Capacity		255 program		
Memory Capacity		30,000 point		
Soldering Condition		Point and Slide Total; 500 Conditions		
Setting Temperature		0 ~ 500°C		
Solder Feeding Speed		1.0mm/sec ~ 50.0mm/sec		
Solder Feeding Amount Resolution		0.1mm		
Solder Diameter	Using ZSB Feeder	φ0.4 ~ φ1.0mm (Option; φ0.3, 1.2, 1.6mm)		
	Using Normal Roller	φ0.3 ~ φ1.6mm		
Heater Capacity		130W		
Nitrogen Generator		Available (Option: APN-05)		
Display Language		English, Chinese, Korean, French, Spanish, German, Italian		
Power Source		AC94V ~ 260V (Single-phase)		
Power Consumption		366W		

J-CAT STELLAR

Desktop Soldering Robot

This robot is the high-powered model of the J-CAT COMET. A 200 watt heater can be added as an attachment and is able to use the larger 2.0mm solder diameter. This machine is most useful in soldering high heat sink applications such as a multilayer board and shielding case.




High Power Heater

Accessories

ZSB Feeder



Air Blow Cleaners



Rotary Cleaners



Fume Extractors



Nitrogen Generator




Tip Position Correction Unit



Pre-Heater



Micro Monitoring Camera



High-Quality Portable Video Recorder



Position Calibration Camera



Tip Thermometer




J-CAT STELLAR Series Main Specifications		
Robot move area	J-CAT200STELLAR	X=200mm, Y=200mm, Z=50mm , R= ±360°
	J-CAT300STELLAR	X=300mm, Y=320mm, Z=100mm , R=±360°
	J-CAT400STELLAR	X=400mm, Y=400mm, Z=100mm , R=±360°
Program, Memory capacity	255 programs, Maximum 30,000 points	
Soldering condition	Point and Slide Total; 297 conditions	
Power	AC90 - 132V, AC180 - 250V	
Power Consumption	490W	
Other	Standard equipment; 200W high capacity heater	
	High power solder feeder can feed maximum 2.0mm diameter	
	Sequence function is equipped to work independently from robot	

J-CAT TERRA

Desktop Soldering Robot

The cartesian desktop robot model J-CAT TERRA, is equipped with a large size LCD screen on the TERRA to easily view the soldering and temperature data without the requirement of viewing via the teaching pendant.

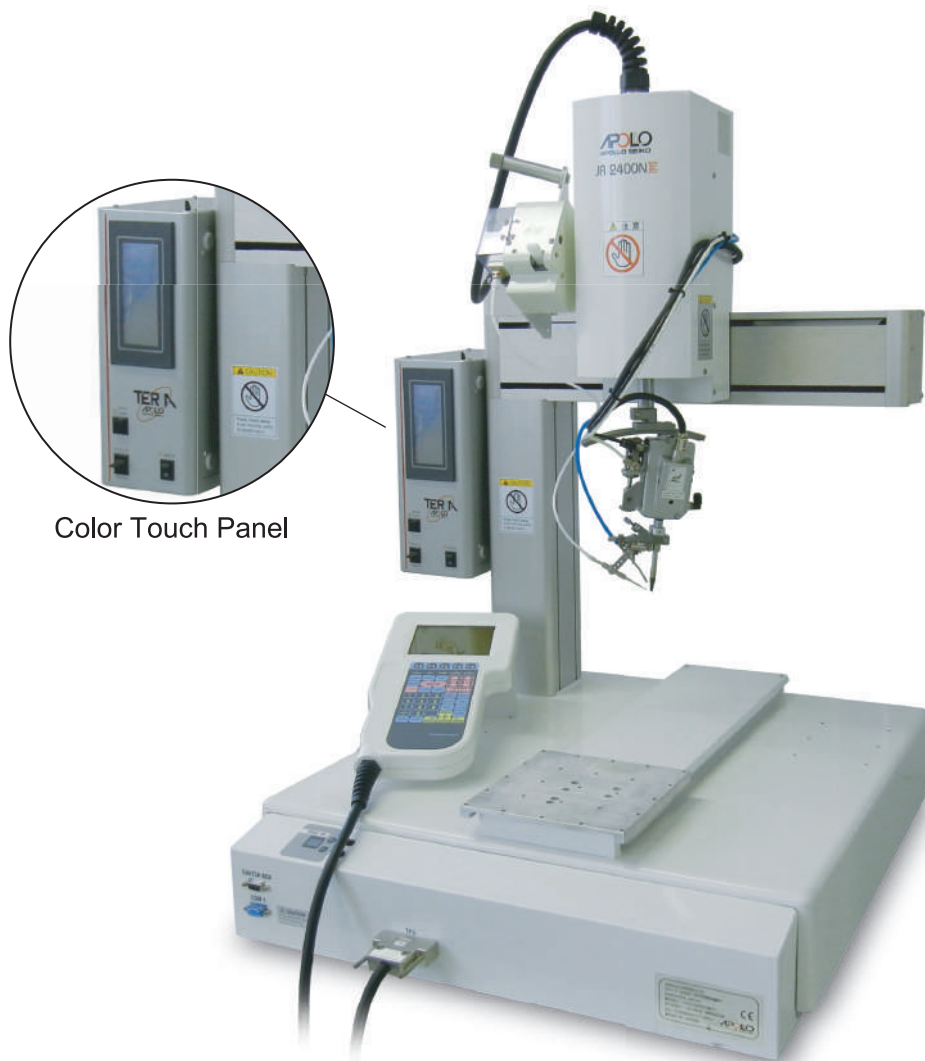


Color Touch Panel

Accessories

ZSB Feeder



Air Blow Cleaners



Rotary Cleaners



Fume Extractors



Nitrogen Generator




Tip Position Correction Unit




Pre-Heater



Micro Monitoring Camera



High-Quality Portable Video Recorder



Position Calibration Camera



Tip Thermometer



J-CAT TERRA Series Main Specifications		
Robot move area	J-CAT200TERRA	X=200mm, Y=200mm, Z=50mm, R= ±360°
	J-CAT300TERRA	X=300mm, Y=320mm, Z=100mm, R=±360°
	J-CAT400TERRA	X=400mm, Y=400mm, Z=100mm, R=±360°
Program, Memory capacity	255 programs, Maximum 30,000 points	
Soldering condition	Point and Slide Total; 297 conditions	
Power	AC90 - 132V, AC180 - 250V	
Power Consumption	366W	
Other	Sequencer function is equipped to work independently from robot	
	A large LCD screen is built-in to the teach pendant for easy operation	
	Standard equipment; 200W high capacity heater, high power solder feeder	

JS TERRA / JS COMET

SCARA: Selective Compliance Assembly Robot Arm

This high speed axially moving robot is ideal for use with in-line applications designed for full automation.



JS250



JS350



JS450



JS550



Comet



Terra



Teaching
Pendant



Control Box

Accessories


ZSB Feeder



Air Blow Cleaners



Rotary Cleaners



Fume Extractors



Nitrogen Generator



Tip Position Correction Unit




Pre-Heater



Micro Monitoring Camera




High-Quality Portable Video Recorder




Position Calibration Camera




Tip Thermometer





JS TERRA / COMET

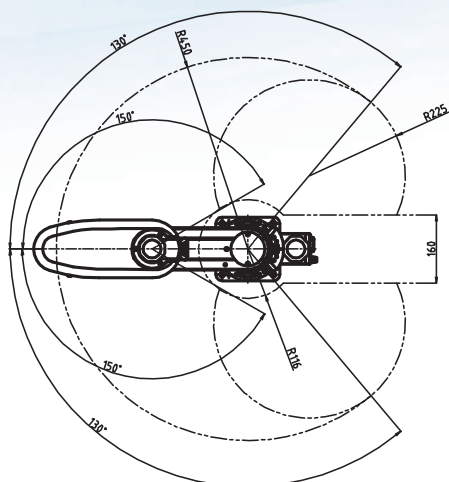

Operation Range

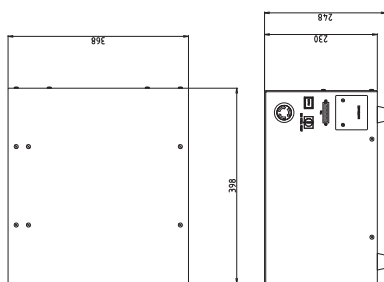

JS 450

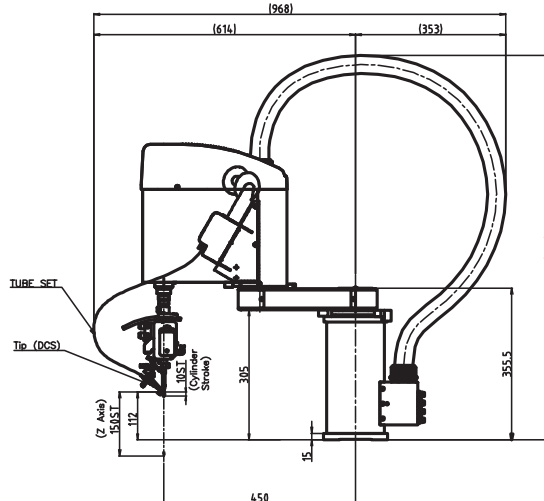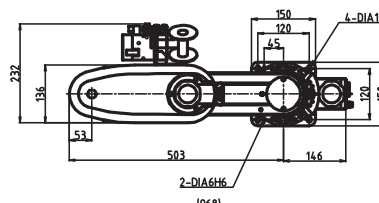

JS Servo Scara Robot Main Specifications


	JS250	JS350	JS450	JS550
J1 Arm	100 mm	125 mm	225 mm	325 mm
J2 Arm	150 mm	225 mm	225 mm	225 mm
Z axes	150 mm	150 mm	150 mm	150 mm
R axes	±360°	±360°	±360°	±360°
Max Payload	4 kg	6 kg	6 kg	6 kg
Max speed (J1+J2)	4200mm/s	6300mm/s	5600mm/s	6200mm/s

Drive Method	AC servo motor
Control Method	PTP(Point to Point)control, CP(Continuous Path)control
Interpolating Function	3-Dimensional line and Arc interpolation
Position Detection	Absolute Encoder
Teaching Method	Remote teaching (JOG)/ Manual data input(MDI) / Direct teaching
Teaching System	Original software : Simple and broad-use teaching system
Teaching Pattern	Programming by teaching pendant
Programming Capacity	255 programs
Data Memory Capacity	Maximum 30,000 points
Simple Sequencer	Maximum 1,000 steps
External Serial Interface	RS422 1ch (For teaching pendant) RS232C 1ch(For PC COM1) RS232C 1ch(External device COM3) COM2: Using solder controller
External Input / Output	I/O-SYS Input 15 / Output 14 I/O-1 Input 18 / Output 22(4-relay contact) I/O-H Input 4 / Output 4(2-relay contact)
Power Consumption	950W(JS250) 1,050W(JS350~550)
Power Supply	AC180~250V(Single phase)
Working Ambience	Ambient temperature:0~40°C Relative Humidity:20~90%

M1-CAT300 *i*

Parallel-Link Soldering Robot

The M1-CAT300i is a high speed, multi-function soldering robot that adopts the technology of the Fanuc Genkotsu robot (first dexterity). This is the world's first soldering robot that operates with parallel-link technology. The high performance operation of six flexible axes make it possible to change the height, direction and angle of the iron tip. This lightweight and compact mechanical unit has been designed to fit into tight work spaces. Incorporating the optional **iRVision** image positioning system, the robot will be guided to the correct solder location every time.

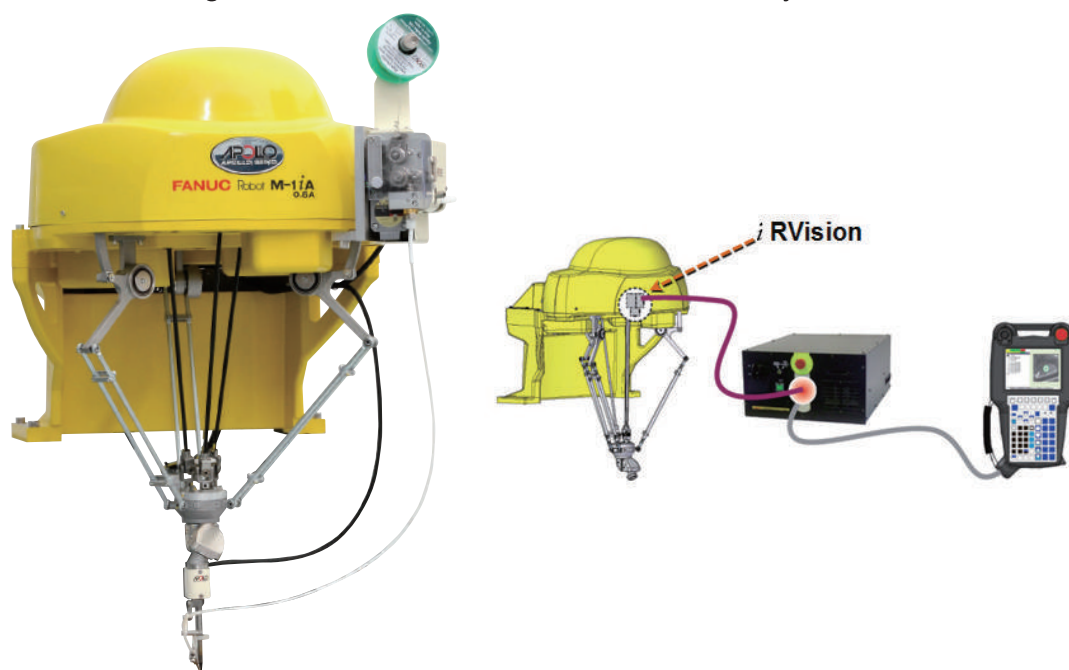


Type	M1-CAT300i	
Operation Mode	Parallel link mechanism	
Drive Method	Electric servo drive by AC servo motor	
Controlled Axes	6 axes (J 1, J 2, J 3, J4, J 5, J 6)	
Operation Range (Max. speed)	J1-J3	Diameter 280mm, Height 100mm
	J4	720° (1440°/sec) 12.57rad (25.13rad/sec)
	J5	300° (1440°/sec) 5.24rad (25.13rad/sec)
	J6	720° (1440°/sec) 12.57rad (25.13rad/sec)
Repeatability	±0.02mm	
Setting Temperature	0~500°C	
Solder Feeding Speed	1.0mm/sec~50.0mm/sec	
Solder Feeding Amount Resolution	0.1mm	
Solder Diameter	Using ZSB Feeder	φ0.4~φ1.0mm (Option: φ0.3mm, φ1.2mm, φ1.6mm)
	Using Normal Feeder	φ0.3~φ1.6mm
Heater Capacity	100W, 130W, 200W (Depends on the unit)	
Nitrogen Generator	Available (Option : APN-05)	
Power Source	Single Phase AC200V	


RS003N

This compact unit offers 6-axis high function performance to handle PCB's and components for soldering, component replacement and automating repetitive tasks. The robot's main unit weighs an easy-to-handle, 20kg and can be mounted on the floor, wall or ceiling. Even with the small size, the robot is equipped with fast accurate and sturdy 6-axis arms for ensuring high reliability and precision. The robot can withstand most operating environments in the industry. When the power is turned off there is no need to worry about a stop position because all six axes have brakes.

APOLLO SEIKO/KAWASAKI RS003N			
Arm Type		Articulated	
Degrees of Freedom		6 Axes	
Axis Work Envelope	Axis	Max. Stroke	Max. Speed
	JT1: Arm rotation	±160°	360° /S
	JT2: Arm out-in	+150° ~-60°	250° /S
	JT3: Arm up-down	+120° ~-150°	225° /S
	JT4: Wrist swivel	±360°	540° /S
	JT5: Wrist bend	±135°	225° /S
	JT6: Wrist twist	±360°	540° /S
Max. Reach		620mm (Distance from JT1 to JT5)	
Max. Payload		3 kg	
Moment	JT4: Wrist swivel	5.8N · m	
	JT5: Wrist bend	5.8N · m	
	JT6: Wrist twist	2.9N · m	
Moment of Inertia	JT4: Wrist swivel	0.12kg · m ²	
	JT5: Wrist bend	0.12kg · m ²	
	JT6: Wrist twist	0.03kg · m ²	
Position Repeatability		±0.05mm (At wrist flange surface)	
Max. Linear Speed		6,000mm/s (At wrist flange surface)	
Mass		20kg (Excluding option)	
Body Color		Munsell 10GY9/1 equivalent	
Installation		Floor, Ceiling or Shelf mount	
Environmental	Ambient Temperature	0~45°C	
	Relative Humidity	35~85% (No dew, nor frost allowed)	
	Vibration	Less than 0.5G	
	Other	The robot installing place should be free from: *inflammable or corrosive liquid or gas *electric noise interference	
Option		Wall Mounting (Max. Payload: 2kg) 1 Double solenoid valve Restriction of motion range 2 Double solenoid valves (mechanical): JT1 (45° pitch) 1 Single solenoid valve External sensor harness (4 circuits) 2 Single solenoid valves	

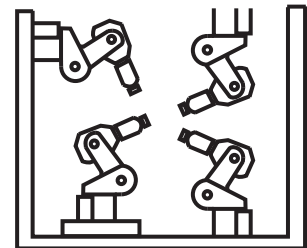

Floor, Wall or Ceiling Mount

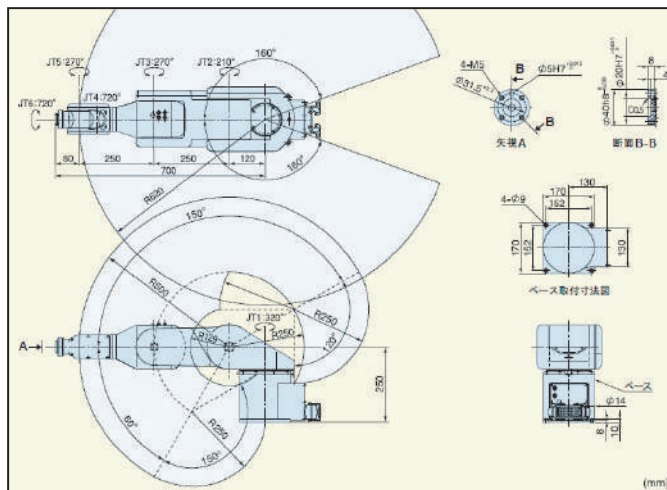

TERRA / LUNA

LUNA and TERRA systems have been designed exclusively for automated soldering. These soldering units can be widely adapted for use in semi & fully automated systems, desk-top robots, linear actuators and your special purpose machine.

TERRA

The 297 soldering profiles can be customized to provide a solution for all types of soldering application challenges. Our 200 watt heater addresses the requirement to solder large thermal mass components and can feed a range of solder diameter between 0.4mm to 1.6mm.



TERRA Specifications

Power	AC 90V ~ AC 264V
Power Consumption	166W
Air Supply	0.4 ~ 0.5 MPa
Solder Type	0.4 ~ 2.0mm Select 1 type 0.4~1.6mm for ZSB Geyan
Solder Conditions	297 conditions (Point 198 & Slide 99) Point 99 Slide 99 Special 99
Setting Temperature	0 ~ 500°
Heater Capacity	200W
Solder step	9 Steps
Wait Temperature	250°C (Adjustable)
External Start Box	Optional
Controller Weight	3.8 kg
Feeder Unit Weight	0.8 kg
Iron Unit Weight	0.5 kg

Configuration

TERRA - SP + +
CO + Iron Tip Solder Diameter

SP: Feeder and controller separate type
CO: Feeder and controller combined type

Components

TERRA Controller
RSP/RSL Iron Unit
Solder Wire Feeder
Solder Wire Feeding Tube
Iron Unit/Feeder signal Cable
Air Tube for Iron Unit
Power supply Cable

LUNA

This unit is equipped with a color touch panel and parameter control, similar to the TERRA. You can select the Luna controller orientation from Vertical & Horizontal options.



LUNA Specifications

Power	AC 90V ~ AC 264V
Power Consumption	154W
Air Supply	0.4 ~ 0.5 MPa
Solder Type	0.4 ~ 1.6mm Select 1 type 0.4~1.2mm for ZSB
Solder Conditions	7 conditions (Point 4 & Slide 3)
Setting Temperature	0 ~ 500°
Heater Capacity	100W, 130W
Solder step	9 Steps
Wait Temperature	250°C (Adjustable)
External Start Box	Optional
Controller Weight	3.5 kg
Feeder Unit Weight	0.8 kg
Iron Unit Weight	0.5 kg

Configuration

LUNA - LSP + +
or SSP + Iron Tip Solder Diameter
or LCO

L: Vertical S: Horizontal

SP: Feeder and controller separate type
CO: Feeder and controller combined type

Components

LUNA Controller
RSP/RSL Iron Unit
Solder Wire Feeder
Solder Wire Feeding Tube
Iron Unit/Feeder signal Cable
Air Tube for Iron Unit
Power supply Cable

RSP / RSL / LFD

Iron Unit for Point and Slide Soldering

It takes 8 seconds to replace the iron cartridge and it does not require position adjustment upon iron cartridge replacement.
The solder feeding position can be precisely set by adjusting the set screw.

Iron Unit For Point Soldering *RSP*

This unit can achieve high speed point soldering. The slim design makes it possible to solder applications with tight accessibility issues. This unit has both a pre-feed and secondary feed height adjustment.



Iron Unit For Slide Soldering *RSL /RSL-FPR*

This iron unit is designed for slide soldering. The spring loaded tip assembly will not damage PCB solder mask during the slide operation.



RSL




RSL-FPR

Solder Feeder for Automatic Soldering *LFD*

It can control feeding amount precisely by its pulse motor and the ZSB roller blade can be attached as an option.

LFD Solder Feeder Specification


Solder Feed Motor	Pulse motor
Solder Wire Diameter	φ0.4~1.6mm
Feed/Reverse Speed	0.1~50.0mm/s
Sensor	Clogged, Shortage
Weight	0.8kg

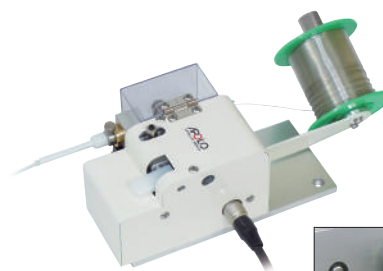

Constant Amount Sleeve Soldering

This sleeve soldering meters, cuts and melts a programmed length of solder wire in the "ceramic sleeve". The iron tip plating oxidation / erosion does not occur when utilizing this special ceramic material. Flux spattering and solder balls are eliminated as the solder melts inside the sleeve. The simple head design allow for quick and easy maintenance. The coaxial design of the heater and mechanical parts provide for easy position teaching. The ceramic heating unit has a very long operational life.

Sleeve Soldering Mechanism

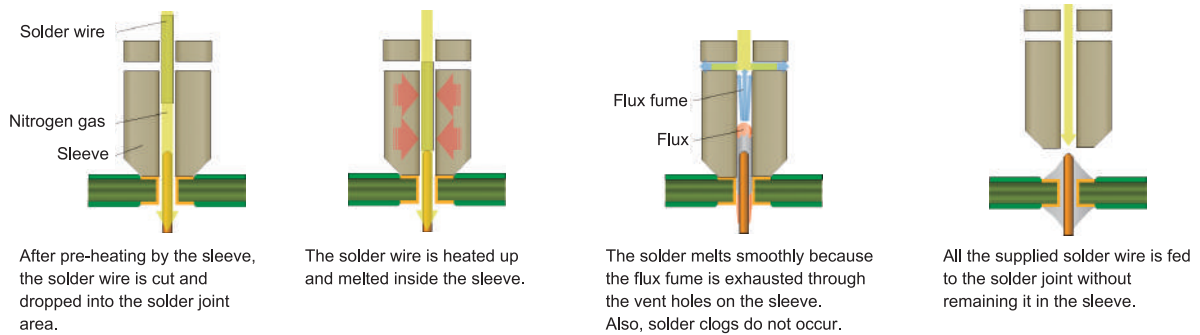

Constant Amount

Solder wire is cut to a programmed length. All the cut solder wire melts and flows to the application without remaining in the ceramic sleeve.

Few Consumable Parts

The ceramic sleeve has a long life because the sleeve is not consumed by wetting solder. There is no need to consider consumable costs.

Standard Equipment of Nitrogen Generator

It enables better soldering by melting the solder wire in an inert nitrogen atmosphere.


No Spattering

Flux and solder wire do not spatter because the high conductivity sleeve encapsulates the complete process.

Easy Maintenance

The simply designed head allows quick and easy maintenance. Daily maintenance is only sleeve cleaning as flux fumes do not come in contact with the mechanical feeding components.

Internal Structure of SLV Head

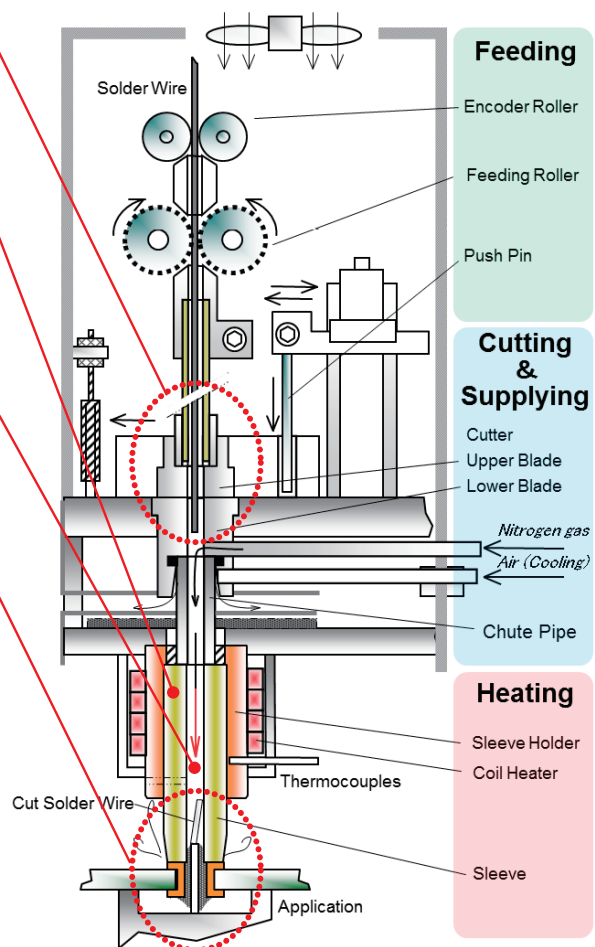

J-CAT SLV

Desktop Sleeve Soldering Robot

This desktop sleeve soldering robot easily installs into a “Lean” cellular production environment.



	J-CAT300 SLV	J-CAT400 SLV
Weight	40kg	50kg
Operation range	X=300mm, Y=320mm, Z=100mm	X=400mm, Y=400mm, Z=100mm
Portable Weight	11kg	
Repeatability	X,Y,Z ±0.007mm	
Program Capacity	255 programs	
Memory Capacity	30,000 points	
Soldering Condition	500 conditions	
Setting Temperature	0~550°C(1°C increment)	
Solder Feeding Amount Resolution	0.1~99.9mm(0.1mm increments)	
Solder Feeding Speed	1.0~50.0mm/sec(0.1mm/sec increments)	
Solder Diameter	φ0.8~1.2	
Apparent Power	400VA	
Heater Power Consumption	160W	
Power Source	Heater for AC100V: AC100V Single phase AC 50/60Hz Heater for AC200V: AC200V Single phase AC 50/60Hz	
Supply Air	0.5M P a	
Interface	For external operation command D-SUB25 female pin (Harness side: male)	

Ceramic Sleeve



A customized ceramic sleeve can be fabricated to meet your application requirements, clearances etc.

Accessories

Drill Cleaner



DRC-1300

Cleaning Heater



CCH-700

Micro Monitoring Camera



CSS-2100

High-Quality Portable Video Recorder



CVR-2100

Position Calibration Camera



SC+A

Tip Thermometer




TTM-140

JC-2-3A SLV

Gantry Type Sleeve Soldering Robot

This robot consists of SLV and JC-2 (Page 37). It is well suited for an in-line process or as a special purpose machine.

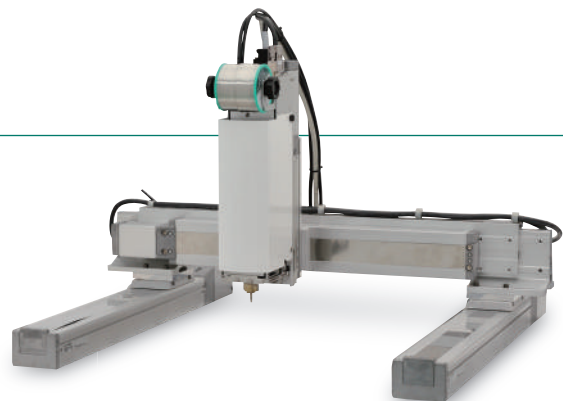

Laser Soldering

MLU-808FS

Laser Soldering System



Desktop robot + Laser Oscillation Unit + Laser Controller
J-CAT300 MLU-808FS

ALBA-Mini FS

Compact Laser Soldering Unit



Laser Controller
ALBA-Mini FS


What is Laser Soldering?

It is non-contact soldering that heats up the target with a high energy light emitted from an oscillated laser diode and is focused with a lens.

Laser Soldering Basic Process


The laser soldering process depends on the type of solder to be used (wire, pre-form or paste).

In the case of solder wire, laser irradiation is performed in advance to the joint area (Pre-heating). This is the most important process in order to wet and allow the solder to flow easily when supplying the solder wire to the joint area.

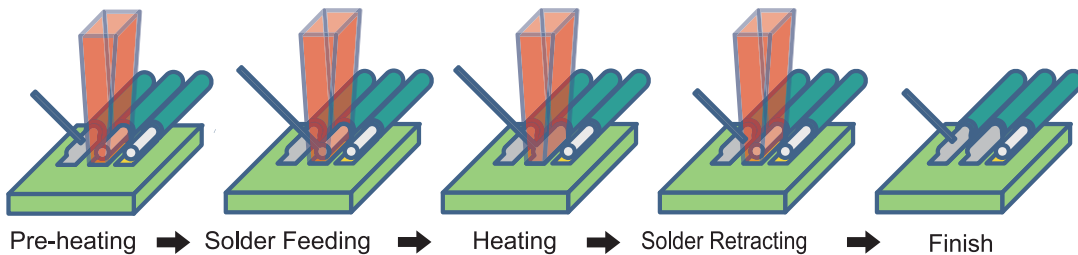

SLIT Beam Option

Although the laser beam shape is generally circular, this originally developed SLIT plate (metal plate with a hole) enables virtually any type of laser beam shape. This allows the beam to match the shape of the components and the pads to be soldered.

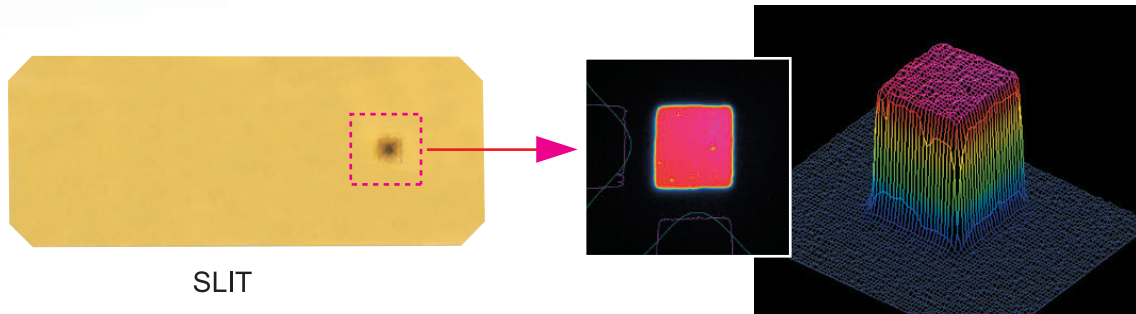

SLIT


Square Beam

Circular Beam
 $\phi 500\mu\text{m}$


Circular Beam
 $\phi 50\mu\text{m}$

Circular Beam
 $\phi 1000\mu\text{m}$


**Various Beam Diameters
Free Beam Shape**

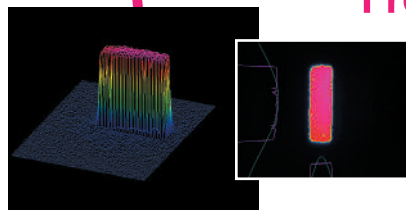

Rectangular Beam
0.25 x 0.75 mm

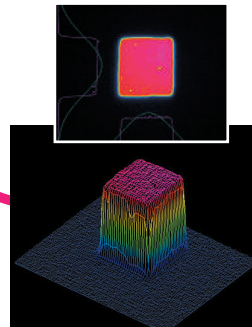

Square Beam
0.8 x 0.8 mm

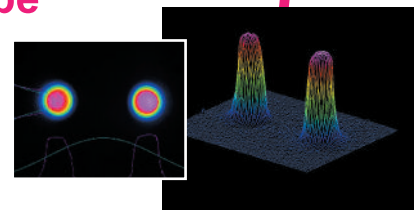

Twin Beam
 $\phi 0.2 \times 2$

Temperature Control Unit TCU-1000 (Option)

* Option only for MLU-808FS


This non-contact radiation thermometer (minimum $\phi 0.25\text{mm}$) measures the temperature of the soldering point in real time.

By sending the temperature data to the laser controller, it controls the laser power by temperature.

This prevents any unexpected temperature rise during soldering, and then it achieves stable soldering by controlling the soldering temperature.



Comparison of Temperature Data

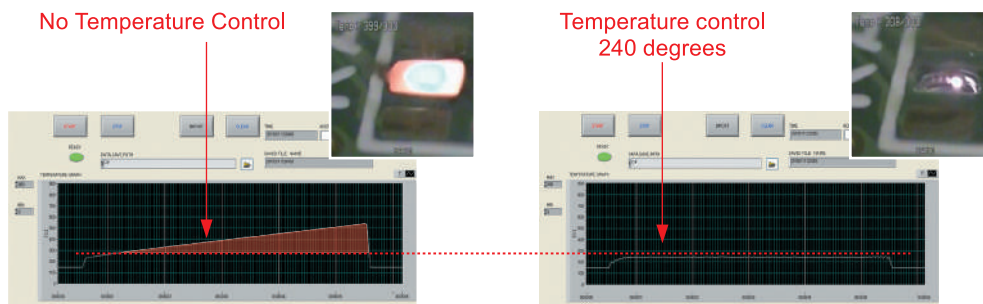

Lens Variety

The type of lens to form a laser beam is composed of two components, the "Input lens" and "Output lens".

With the combination of these lenses, over 100 diameter variations can be achieved.



Specifications

Model			MLU-808FS	ALBA-Mini
Material			Semiconductor Laser	
Oscillation			CW (Continuous Wave)	
LD Type			Fiber Coupling	
LD Output			35W / 45W	30W / 50W / 80W
Wavelength			808nm	808nm or 980nm
Guide Beam			●	
Halation Prevention			●	
LD Cooling System			Electric Cooling	
Coaxial Observation Function			●	
Fiber Core Diameter			φ 200μm / φ 400μm	
Fiber Length			3m	1.5m (OP 3m)
Focused Beam Diameter			φ 50μm ~ 8000μm	
Focal Length			10mm ~ 200mm	
Focused Beam Shape			Circular / Rectangular / Free Shape by SLIT option	
Temperature Control			Available	Not Available
Parameter Control Mode	Time	Setting Resolution	0.1sec / 0.01sec	0.01sec
		STEP	1~100 STEP	15 STEP
		Time Setting	1 STEP = 0.1sec (Max: 0.1sec × 100STEP = 10sec)	1 STEP = 0.05sec ~ 60sec (Max: 60sec × 15STEP = 900sec)
	Current (A) Control	Setting Resolution	0.1A	0.1A
Registered Waveform Capacity			16	63
Interface			Input Terminal x 1 Sig. OUT (BNC) x 1 CURR. MONI (BNC) x 1 RS232 x 1 Analog Input (0~5V) x 1	Parallel I/O (D-Sub 25 Pins Male) x 1 RS232 x 1 Analog Input (0~5V) x 1
Dimension W x D x H	Laser Coaxial Head		160.5 x 114 x 366 mm (Maximum size)	
	Laser Oscillation Unit		270 x 260 x 230 mm	—
	Laser Controller		430 x 350 x 149 mm	188 x 302 x 237 mm
Weight	Laser Coaxial Head		Approx. 1kg	
	Laser Oscillation Unit		Approx. 6.5kg	—
	Laser Controller		Approx. 16kg	Approx. 22kg
Power			Single Phase AC100V / AC220V±10% 50/60Hz	Single Phase AC100V~240V 50/60Hz

F-CAT iN 350 / 500

In-line Selective Flow System

This selective flow system is an in-line module type consisting of Pre-fluxing, Pre-heating and Soldering.

It is equipped with various functions such as Automatic Nozzle Cleaner, Automatic Flow Control and a Position Calibration Camera.

The solder bath can be selected from Single or Dual type.

The modular type system allows for customization and expansion of your system.



Automatic Nozzle Cleaner

Considering safety and ease of maintenance, the nozzles that used to be cleaned manually are now cleaned automatically.




Nozzle Positioning Camera

Any movement to the nozzle position shift and slope, that can occur during its exchange is automatically calibrated.



Automatic Flow Height Control

This camera observes and calibrates the flow height change that occurs from the solder surface height in the bath and any variation by the rotation of the impeller.

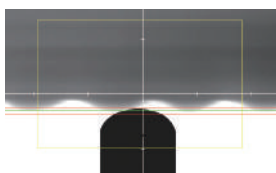

Position Calibration Camera

The cameras equipped in the Pre-fluxing and Soldering modules detects and calibrates any application shift.



F-CAT iN350 / 500 Specifications

Common Specifications

	Fluxing Module	Pre-Heating Module	Soldering Module
System Configuration	Conveying system: AC servo motor conveyor (Automatic adjustment of conveyor width)		
	Spray and Dot Fluxer Position Calibration Camera Monitoring Camera	Radiation-type Near-infrared Heater - 6 panels (Top & Bottom)	Solder Bath Capacity 5kg PID Temperature Control Automatic Nozzle Cleaner Nitrogen Supply Unit Top Side Pre-heat unit Position Calibration Camera Automatic Flow Control Camera Nozzle Positioning Camera Monitoring Camera
Options	Barcode / QR code Reader	-	Barcode / QR code Reader Simple AOI System
Power Supply	200 – 240V AC Three-Phase		
Air Supply	0.6MPa and more		
Nitrogen Supply	Pressure: 0.3MPa Flow: 50L/Min Purity: 99.99% and more		

F-CAT iN350S

Model	F-CAT iN350S-F	F-CAT iN350S-H	F-CAT iN350S-S
Solder Bath Nozzle	Single	-	Single
Operation Range (Board size)	50 x 50mm – 350 x 350mm	50 x 50mm – 350 x 350mm	50 x 50mm – 350 x 350mm
Dimensions W x D x H	800 x 1600 x 1500mm	800 x 1600 x 1500mm	1200 x 1600 x 1500mm
Power Consumption	22kW		

F-CAT iN500S

Model	F-CAT iN500S-F	F-CAT iN500S-H	F-CAT iN500S-S
Solder Bath Nozzle	Single	-	Single
Operation Range (Board size)	50 x 50mm – 500 x 400mm	50 x 50mm – 500 x 400mm	50 x 50mm – 500 x 400mm
Dimensions W x D x H	800 x 1600 x 1500mm	800 x 1600 x 1500mm	800 x 1600 x 1500mm
Power Consumption	25kW		

F-CAT iN350D

Model	F-CAT iN350D-F	F-CAT iN350D-H	F-CAT iN350D-S
Solder Bath Nozzle	Dual	-	Dual
Operation Range (Board size)	50 x 50mm – 350 x 350mm	50 x 50mm – 350 x 350mm	50 x 50mm – 250 x 350mm (One side)
Dimensions W x D x H	800 x 1900 x 1500mm	800 x 1900 x 1500mm	1200 x 1900 x 1500mm
Power Consumption	24kW		

*These specifications may be changed without prior notice.

F-CAT 350A / 500A

All-in-one Selective Flow System



This is the all-in-one selective flow system for the production in a high-mix, low-volume environment. In the same way as the F-CAT iN350/ 500(previous page), the three processes of Pre-fluxing, Pre-heating and soldering are equipped in one compact system.

It is possible to select from the combination of conveyor type, single / dual solder bath and the application board size (robot stroke).

Standard Equipment:
 Automatic Nozzle Cleaner,
 Automatic Flow Height Control
 Position Calibration Camera



All-in-one inline type:
 F-CAT iN 350A / 500A

Specifications

Solder Bath	Single		Dual
Model	F-CAT 500S-A	F-CAT 350S-A	F-CAT 350D-A
Maximum Board Size	500 x 400mm	350 x 350mm	250 x 350mm (One side)
Dimensions W x D x H	1200 x 1900 x 1500mm	1000 x 1800 x 1500mm	1200 x 2100 x 1500mm
Dimensions W x D x H	800 x 1900 x 1500mm	800 x 1900 x 1500mm	1200 x 1900 x 1500mm
Power Supply	200 – 240V AC, 50/60Hz, Three-Phase		
Air Supply	0.6MPa (+/- 0.1Mpa)		
Nitrogen Supply	Pressure: 0.2MPa Flow: 60L/Min Purity: 99.99%		

*These specifications may be changed without prior notice.



F-CAT C 540 Easy Selective Flow System

F-CAT C 540 is easy to implement into your process. The compact design of this system with fluxer allows for easy integration.

By using the same solder bath and fluxer as the top models, it achieves reliable soldering results.

Maximum Board Size: 200 x 300mm
 Solder Bath Capacity: 5kg
 Power Consumption: 2kW
 Dimensions: 1000 x 1000 x 1000
 Power Supply: 200V, Single Phase

HASL

Hot Air Unit

This Hot Air Cartridge has been developed with Apollo Seiko's direct heating technology that was accumulated by the development and production of our iron cartridges. The fine Hot Air Cartridge enables micro and narrow pitch soldering. The shape and size of the air outlet can be fabricated per your application requirements.

The control unit has an excellent response and stable high-performance temperature controller. The equipped mass flow controller can perform accurate air (nitrogen) amount control. It is also possible to use as a pre-heater prior to soldering.



Control Unit



Cartridge Unit

Specifications		
Temperature Range	0 – 500 degree	
Power Supply	100V – 240 V AC	
Flow Amount	0.1 – 5 L/Min	
Hot Air Cartridge	130W DC Heater	
Weight	Control Unit	Approx. 3kg
	Cartridge Unit	Approx. 0.5kg
Other	Option: Nitrogen Generator APN-05	

PPH300

Power Pulse Heat Unit

The compact head design and fine heater cable allow easy attachment to a robot or other actuator. It is suitable for soldering, heat press-fit, heat-crimping and plastic welding etc.




Specification	
Model	PPH300
Control Box	
Dimensions (W x D x H)	320×450×230 mm
Power Source / Power Consumption	AC90~132V, AC180~250V Single Phase / 300VA
Air Supply	0.5 MPa (Only Dry Clean Air)
Drive method	Inverter method by power MOSFET
Over-current protection	Electric current detection by current sensor
Temperature control method	
Detection sensor	K type themocouple sensor with safety protection
Control method	PID control using 16bit CPU
Tool temperature setting range	Room temperature - 500 °C
Heat temperature setting range	150 °C - 500 °C
Heat time setting range	0.1 second - 99.9 seconds
External control	
Photo isolation input / output	Photo transistor output / Photo diode input


SSA

Solder Feeder for Automation Equipment SSA

The solder can be fed forward or reverse and controlled by an external I/O controller. If used to control the solder liquid surface level, it automatically keeps the level constant. In addition, it can be attached to the equipment as a feeder of an automatic soldering system.

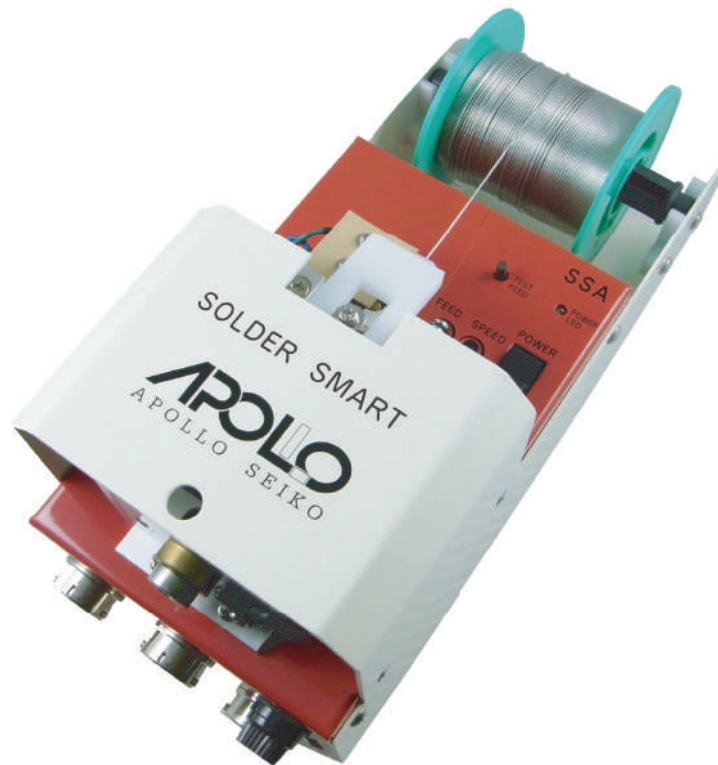

External I/O

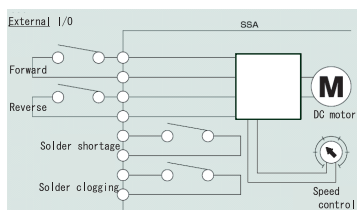

SSA Main Specification

Power	AC100V 50/60Hz
Using Motor	DC motor 5 Watt
Solder Diameter	0.4mm~2.0mm
Solder Feed	External control (high / Low)
Solder Feed Speed	10mm/sec ~ 30mm/sec
Solder Feed Reverse	External control (30mm/sec)
Sensor	clogged / shortage sensor
External Control	Available
Weight	Approx 2kg
Accessories	I/O Connector, External Power Supply Connector, Power Cable
Option	Solder Wire Feeding Tube

TTM-3000N

Manual Soldering Station

The high-powered soldering station provides 100 watts of soldering power. The extremely fast heat up & temperature recovery, along with the ability to integrate N2 gas, make the TTM -3000N ideal for lead free soldering. The N2 gas can be pumped directly into the TTM-3000N via APN-05 generator or factory supplied Nitrogen. Statistical temperature data can be downloaded to a PC using an optical USB cable.



TTM-3000N Main Specifications

Power	AC90-264V Single phase
Heater capacity	100W (DC48V)
Grounding resistance	Less than 2Ω
Temp. Control	PID control
Control interval	0.1 second
Size	110 (W) x115 (D) x135 (H) mm
Weight	2 kg
Max. Power consumption	150W
Accessories	Iron Cartridge Grip, Iron Cartridge, Iron Holder Stand, Tip Removable Pad, Ground Terminal, Fuse 2A, Power Cable

TTM-1000H

Lead Free Manual Soldering Station

This equipment is designed to produce lead free soldering with no static electricity. It is economical because the only necessary replacement part is the Iron tip.



TTM-1000H Specifications

Power	AC100, AC115V, AC220V	
Setting temperature	200~420°C	
Heat capacity	90W	
Output power	36VAC, 400KHz High frequent current	
Temp. consistency	±2°C (No load)	
Raising time	25 sec. (300°C)	
Weight	Controller	2.5 kg
	Iron unit	0.1 kg
	Iron stand	1.0 kg
Accessories	Iron Cartridge Grip, Iron Cartridge, Iron Holder Stand, Power Cable	

SSB

Iron Unit with Solder Feeder SSB

This integral unit will increase efficiency of manual solder work. Handling the iron unit and feeding the solder are two actions that can be done with one hand. The solder wire feed length is controlled with a timer which provides good soldering quality. There are two options of iron units. The pistol type or pencil type. In addition there are more than 20 different types of iron tips available.



AM Iron Unit (Hand Gun Type)
Feeding Tube Type: TU*-*-***V
Solder Wire Diameter Total Length



PM-S Iron Unit (Pencil Type)
Feeding Tube Type: TU*-*-***S
Solder Wire Diameter Total Length




PM-L Iron Unit (Pencil Type)
Feeding Tube Type: TU*-*-***L
Solder Wire Diameter Total Length

	Heater Type	Iron Tip
60W	C-60-6	AS-6**
100W	SA-100W	AS-8**
150W	SA-150W	AS-10**

SSB Main Specifications


Power	AC100V 50/60Hz
Using Motor	DC motor 5 Watt
Thermostat	Vari-tap type
Solder Diameter	0.4mm~2.0mm
Solder Feed	1 Pulse timer / Continuous
Solder Feed Speed	10mm/sec ~30mm/sec
Solder Feed Reverse	N/A
Weight	Approx. 2kg
Constitution	Solder Wire feeder, Iron Unit, Iron Tip, Power Cable
Options	Iron Unit Stand (AK-1) Foot Switch (can be connected) Solder Wire Feeding Tube

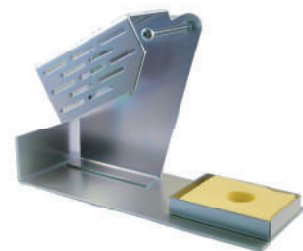


Iron Unit Stand: AK-1 (Option)

Iron Cartridge

TTM-3000N

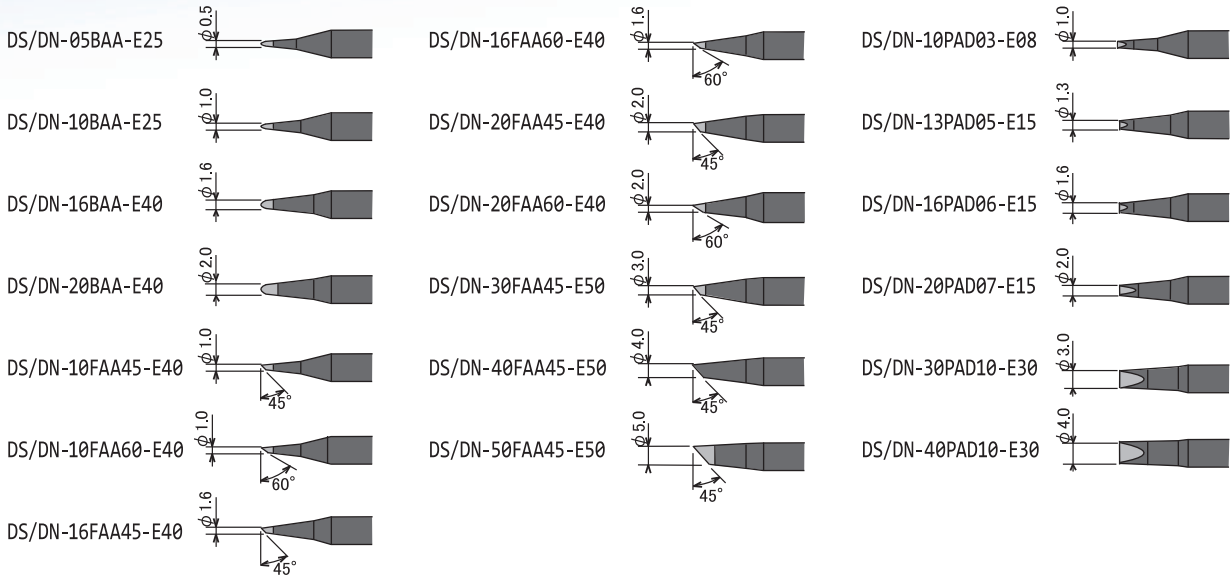


TTM-1000H

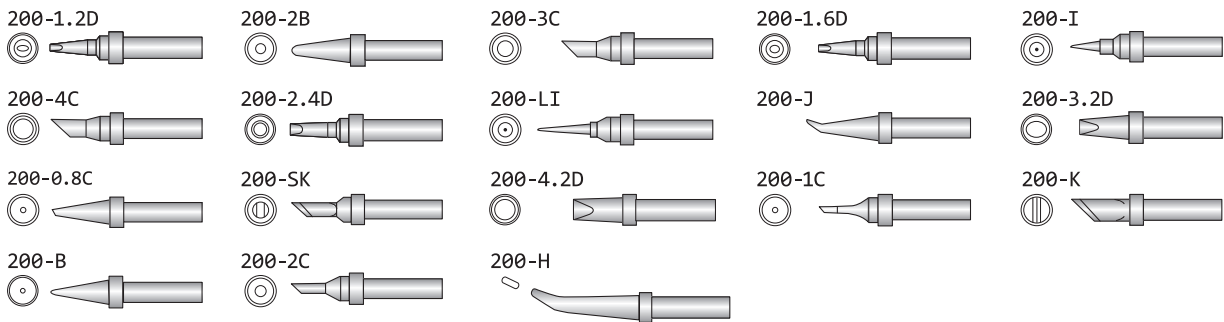


SSB


For 60W(C-60-6)

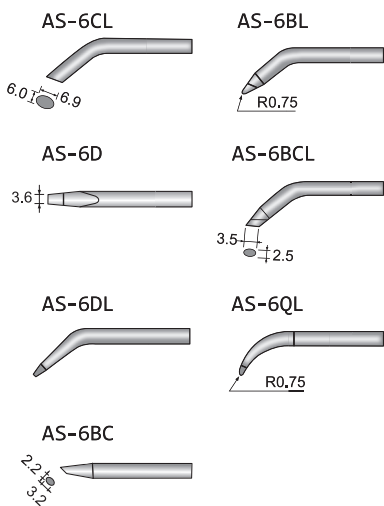

For 100W(SA-100W)

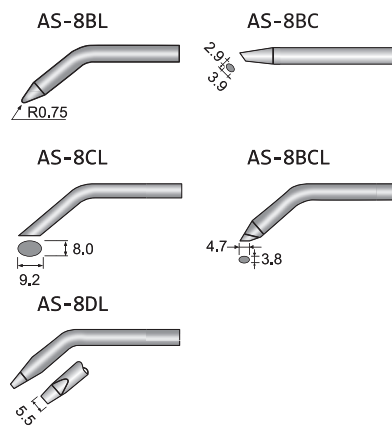

For 150W(SA-150W)

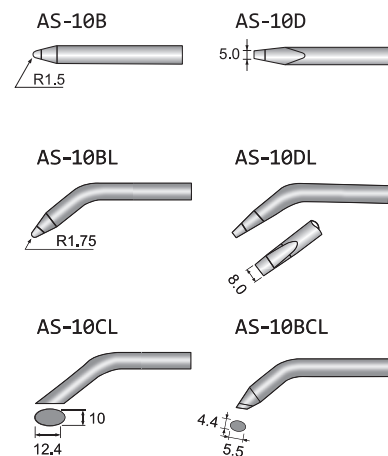

ZSB-10 / 16

Zero Solder Ball Feeder

The ZSB feeder has a built-in roulette cutting blade which creates evenly spaced holes while precisely feeding solder wire. During soldering, the flux is released evenly through these holes which provides consistent flux coverage without spattering.



ZSB-10/16	
ZSB-10	0.4mm~1.0mm
ZSB-16	1.0mm~1.6mm
Weight	1.5kg
Size	190 (W) x85 (D) x80 (H) mm
Power consumption	45VA
Power	AC100-240V multi adaptor
Accessories	Foot Switch, Power Cable
Option	Solder Wire Feeding Tube

WICK GUN

Wick Dispenser to Absorb Solder

The desoldering "Wick gun" is easy to feed and absorb solder. The used wick can easily be cut with one hand by pulling the built-in trigger.



Model 1000-1 Standard Parts	
1 x Model 1000-1 dispenser	
1 x W4015-1 cassette	
Model 1000-1 Spare Parts	
Part No.	Description & Size (Width, Length)
W4015-1	Wick cassette #1, W=0.9mm L=4.57mm
W4015-2	Wick cassette #2, W=1.5mm L=4.57mm
W4015-3	Wick cassette #3, W=2.2mm L=4.57mm
W4015-4	Wick cassette #4, W=2.9mm L=4.57mm
W10010	Cutter blade

J-CAT GRT

Board Cutting Desktop Robot

This is a three axis desktop robot that comes in three sizes with integral position detection encoders. An electric router with an exclusive and easy to use software firmware and high powered dust collection kit are included. A glass epoxy or standard FR-4PCB equal to or less than 1.6mm thickness can be cut while monitoring the router bit sharpness. The capability greatly reduces faulty cutting situations.



Main Specification			
Mode	J-CAT200GRT	J-CAT300GRT	J-CAT400GRT
Maximum Work Dimensions	X=200mm Y=195mm Z=45mm	X=300mm Y=320mm Z=95mm	X=400mm Y=400mm Z=95mm
Dimensions (W x D x H)	350 x 436 x 615mm	585 x 580 x 650mm	646 x 641 x 650mm
Weight	26kg	39kg	47kg
Applicable Board Materials	Glass epoxy / Paper phenol laminate, etc. (Maximum thickness 1.6mm)		
Tool Specifications	DC brushless motor Rated speed 40,000rpm 0.2mm (guide value)		
Trace Accuracy	(When Router 0.8mm, Cutting speed 10mm/s, PCB thickness 1.6mm)		
Vacuuming Method	Ejector		
Teaching Method	Remote teaching (JOG) / Manual data input (MDI)		
Power Supply	AC90~132V AC180~250V1Ph/340VA		
Air Supply	0.5MPa (Only dry clean air)		
Air Consumption	200NL/min		
Standard Accessories	Teaching pendant, Manual, Software (Factory installed), Dust collecting kit, Router bit (Consumable) Spare vacuum nozzle		



Powerful Swarf Collecting System




Spindle Motor Load Indicator

JC-2 Series

3-Axis Orthogonal Robot

Accurate and smooth trajectory and high repeatability are possible with the 3-axis and micro-step control. When high tolerance motion is utilized, the upper portion of the head does not wobble or vibrate. The teaching pendant and I/O are identical to the existing J-CAT series of robots, therefore, communication and control is user friendly.

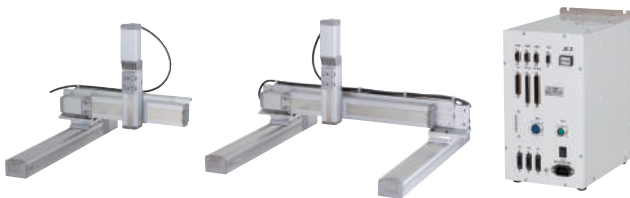

Line-up / Type

e.g.) JC-2T-202005-02

JC-2	T	20	20	05	02	
JC-2	Support form	X axis range		Y axis range	Z axis range	Motor cable length
Single	T	Single	Double	Single	50mm 05	2m 02
Double	H	200mm 20	300mm 30	200mm 20	100mm 10	3m 03
		300mm 30	400mm 40	300mm 30		5m 05
		400mm 40	500mm 50	Double		10m 10
		500mm 50	600mm 60	400mm 40		
		600mm 60		500mm 50		

		JC-2T (Single)	JC-2H (Double)
Controlled Axes		3 axes synchronous control	3 axes synchronous control
Portable Weight	Tool	2kg	4kg
Max. Speed (PTP Movement)	X Axis Stroke	500mm/sec	500mm/sec
	Y Axis Stroke	600mm/sec	600mm/sec
	Z Axis Stroke	250mm/sec	250mm/sec
Max. Speed (CP Movement)	X, Y, Z Combined Speed	600mm/sec	600mm/sec
Repeatability		±0.02mm	±0.02mm
Dimensions	Robot	W: Y axis stroke +229mm D: X axis stroke +291mm H: Z axis stroke +334mm	W: Y axis stroke +336mm D: X axis stroke +291mm H: Z axis stroke +334mm
	Controller	W170×D260×H325mm	
Control Method		PTP (Point to Point) , CP (Continuous Path)	
Interpolating Function		Three-dimensional linear interpolation, three-dimensional circular interpolation	
Teaching Method		Remote teaching (JOG), Manual data input (MDI)	
External Interface		RS422 1ch (for teaching pendant) RS232C 1ch (for PC, COM1) RS232C 2ch (for External device, COM2, COM3)	
External Input / Output		I/O-SYS Input 16 / Output 16 I/O-1 Input 6 / Output 8 (4-relay contact)	
Simple PLC Function		100 programs (1,000 steps / program)	
Power Source		AC90~132V (Single Phase) / AC180~250V (Single Phase)	

J-CAT SCD

Screw Tightening Desktop Robot

There are two types of drivers, a Servo and mechanical torque driver. The software of the robot can detect a jammed screw, loose screw and driver racing.



J-CAT SCD Series Main Specifications			
Type	J-CAT 200 SCD	J-CAT300 SCD	J-CAT 400 SCD
Move Area	X=200mm Y=200mm Z=50mm	X=300mm Y=320mm Z=100mm	X=400mm Y=400mm Z=150mm
Size (W X D X H)	350 x 436 x 615mm	585 x 580 x 650mm	646 x 641 x 650 mm
Weight	26kg	39kg	47kg
Portable Weight	7kg	11kg	11kg
Max Speed PTP X,Y Axis	500mm/sec	800mm/sec	800 mm/sec
Z Axis	250mm/sec	320mm/sec	320mm/sec
Resolution	X, Y, Z Axis: +/- 0.01mm		
External I/O	I/O-SYS Input 16, Output 16		
Teaching Method	Remote Teaching (JOG) / Manual Data Input (MDI)		
Available Screw	M1.0 X M8.0 mm		
Output Torque	0.03 Nm - 5.55 Nm		
Power Source	AC90V-132V, AC180-250V 1 Ph		
Accessories	Operating Manual (CD-ROM), Power Cable		

J-CAT DSV

Dispensing Desktop Robot



The J-CAT DSV is a newly introduced, economical dispensing robot. The unit has a push button to allow the robot to move to an area for dispense material purging. The standard machine can handle most dispensing applications.




J-CAT DSV Main Specification		
Type	J-CAT 200 DSV	J-Cat 300 DSV
Move Area	X=200mm Y=200mm Z=50mm	X=300mm Y=320mm Z=50mm
Size (W X D X H)	320 x 364 x 549 mm	560 x 511 x 609 mm
Weight	17kg	30kg
MAX SPEED PTP	500 mm/sec (1-500mm/sec)	
X, Y, Z Axes	200mm/sec (2-200mm/sec)	
Max Speed CP XYZ Axes	200mm/sec (0.1-200mm/sec)	
Portable Weight	Work 5kg, Tool 2kg	
Resolution	X, Y, Z Axes: +/- 0.01mm	
Interpolating Function	3-dimensional line and arc interpolation	
External I/O	I/O-SYS Input 8, Output 8 I/O-DSP Input 1, Output 2	
Teaching Method	Remote Teaching (JOG) / Manual Data Input (MDI)	
Power Source	AC 90-132V, AC 180-250V 1PH 150VA	
Air pressure	0.5 MPa Dry Air	
Accessories	Operational Manual (CD-ROM), Power Cable	

ZSB


The built-in roulette cutting blade makes evenly spaced holes while precisely feeding solder wire. During soldering, flux is released evenly through these holes. This provides consistent flux coverage without spattering and allows solder to melt on a clean, active surface.

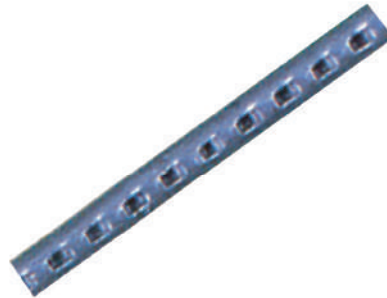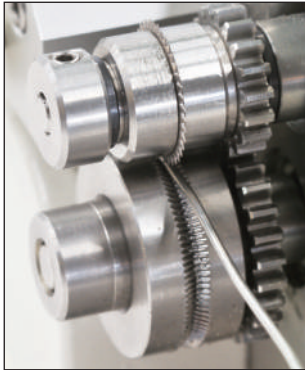

Comparison test results:

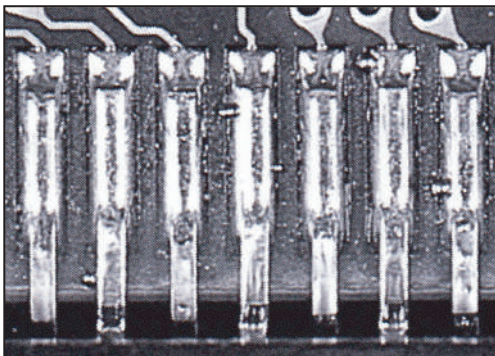


Solder ball spreading test without ZSB

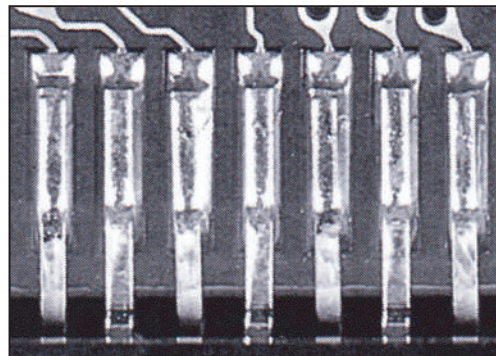

Solder ball spreading test with ZSB

Test Results

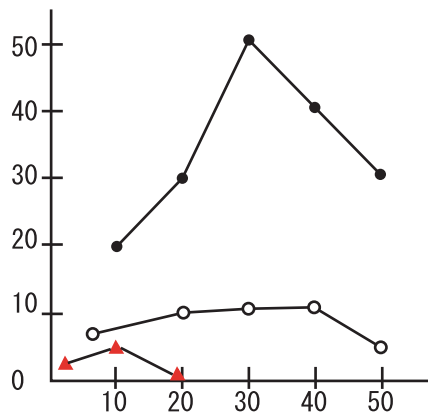

- Normal (No cut)
- V cut
- ▲ ZSB-10

Comparison Test Conditions

Iron Temperature	350°C
Solder Feeding Spread	10mm/sec
Solder Feeding Quality	100mm
Solder Diameter	0.5mm (.020")
	Sn60%Pb40%
	2%Flux

Iron Tip Cleaners

Air Blow Iron Tip Cleaner

You can select the iron tip cleaner based upon your application.

CRB



CRB-A2



Rotary Iron Tip Cleaner

SRC-500DC



The wet sponges rotate and clean the iron tip. Sponges can be programmed to rotate forward and reverse based upon I/O signal.

BRC-3000



The stainless steel brush rollers rotate and remove oxides from the tip and are designed to be utilized in lead free process.

APN-05

Nitrogen Gas Generator

This is an ultra small N2 gas generator which can be built into a soldering robot or attached externally. A 0.5 liter per minute flow rate helps clean the soldering surface and eliminate oxidation.

Main Specification	
Model	APN-05
Air supply	0.5~0.6MPa(Only dry & clean Air)
Nitrogen Gas Flow	0.5l/min
Nitrogen Gas Con	99.9% (When nitrogen gas flow 0.5l/min)
Power Supply	AC100V~240V less than 1.4W
Dimension	Approx 110(W)x 200(D)x 100(H)mm
Weight	Approx 1.4kg
Accessories	Power Adapter, I/O Connector, Air Tube (2 types), Air Cock




F71RH / FW71RH

Automatic Tip Position Correction Unit

This optical sensor prevents misalignment of a wearing iron tip.

Type	F71RH (for J-CAT)
Sensor	Optical sensor (For X/Y-axis) Low-contact touch sensor (For Z axis)
Correction Accuracy	±0.1mm (X/Y/Z- axis)
Power Supply	12 ~ 24 V DC
Weight	Approx. 0.8kg
Accessories	I/O SYS Cable, Attaching Plate

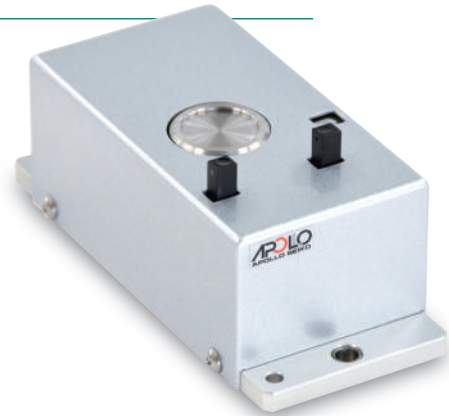

TTM-140


Tip Thermometer

The well-designed sensor allows for easy placement and accurate readings for iron tips. It achieves stable measurement within seconds.

Specifications	
Type	TTM-140
Power Supply	AA battery LR6 x 4pcs : 6V
Dimensions	83 (W) x 42 (H) x 140 (D) mm
Weight	150g (w/o battery)
Temperature Resolution	1°C
Temperature Measuring Range	Sensor (TTM-140S) : 0-500°C Probe (TTM-140SP) : 0-700°C
Temperature Accuracy	0-500°C → ±3°C / 501-700°C → ± 4°C (excluding sensor error)
Operating Environment	0-50°C 20-85%RH (no condensation)
Accessories	Sensor 3pcs / AA battery LR6 x 4 pcs




TTM-140SP
Sensor Probe
for Solder Pot



TTM-140S
Temperature Sensor
(3pcs)

Fume Extractor

Solder fumes can irritate eyes, nose and throat. Also, they could cause problems if the fumes accumulate on the equipment. For these reasons, we recommend the use of the fume extractor. We offer three types of Fume Extractor systems.

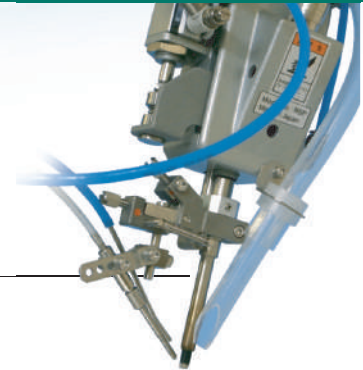

VAC-3000

If there is no air duct near the work space, use VAC-3000 together with VAC-1000. Three carbon filters make solder fumes and exhaust clean.



VAC-3000 Specification

Filtering Rate	More than 95%, 0.3 μm
Vacuum Type	Ejector
Air supply	0.5Mpa (Dry Air)
Noise Level	Below 82dB
Size	194(W) × 170(D) × 308(H)
Weight	Approx. 4.0kg

Solder fumes are vacuumed through a silicone tube mounted directly to the point of soldering. The combination of the two filtering units (pre-filter & HEPA filter) removes all harmful gases, thus preventing flux build-up on the iron and extending tip life all while keeping the environment clean and safe.

System15 Specifications

Filtering Rate	More than 99.997%, 0.3μm (HEPA)
Vacuum Type	IP54 Synchronous (Brushless) motor
Air Flow	70m ³ /Hr
Noise Level	Below 50dB
Size	360(W) × 330(D) × 500(H) mm
Power	AC230V 1ph 50Hz or 110V 1ph 60Hz



Purex Specifications

Filtering Rate	More than 99.997%
Wattage	50W / 75W
Air Flow	100m ³ /hr 59cf/m
Noise Level	52 dBA
Size	455mm(W)x480mm(D)x720mm(H)
Power	AC230V +/- 10%, 120V +/- 10%



SC+A

Position Calibration Camera

This camera has been designed exclusively for use with our soldering robot. It can be installed on both the J-CAT and JS SCARA robot.



Monitoring Example


Specifications

Dimensions	61mm x 134mm x 40mm
Weight	410g (without lens)

CSS-2100

Small Soldering Camera Monitor

The micro cameras easily attach to the Apollo soldering robot. The function of the CCD camera is for teaching and process monitoring. Due to the miniature size, each camera can be easily integrated on all Apollo robots.

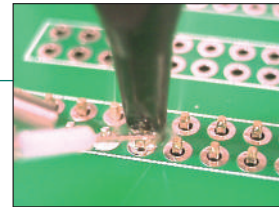

CCS-2100 Camera Specifications

Sensor	1/4 inch color CCIQ II
Indication pixel	316K pixel
Resolution	400 TV line
Picture signal	NTSC video
Focus distance (Min.)	About 20 mm
Min. vision area	About 5 mm(D) x 40 mm(W)
Focus distance (Max.)	About 100 mm
Max. vision area	About 30 mm(D) x 40 mm(W)
Ambient environment	-10C~45C, 85% no condensation
Voltage	DC5-12V (AC 100-240V Multi Adadpter)
Power consumption	50mA
Accessories	Attaching Bracket, Adapter, Power+Data Cable

CVR-2100

High-Quality Portable Video Recorder

By connecting to CSS-2100 of CCD camera, this recorder allows real-time recording of the soldering process without a PC. The stored data on the SD card makes it easy to transfer to a PC.

Specifications	
Memory Type	SD card (Max. 32GB)
Resolution	1280 x 720 pixels
Video Input	Composite AV input
Video Output	HDMI / Composite AV output
Weight	260g
Dimensions	75mm (W) x 25mm (D) x 130mm (H)
Battery	4400mAh (Max. recording time 9h)
Accessories	Multi-adaptor, USB cable, AV cable



YPH-10

The stainless steel sleeve is equipped with two heaters to pre-heat the solder wire as it is being fed. This helps to prevent solder ball spattering by pre-heating the solder wire & internal flux. This is designed to be used with large diameter solder wire and is effective in reducing tact/cycle time as well as improving quality in lead free and tin/lead applications.



YPH-10 Specifications	
Setting Temperature	0~200°C
Heater Capacity	10W
Power Source	AC85~240V
Solder Diameter	φ1.0~1.6
Constitution	Temperature Controller, Solder Wire Heater, Attaching Bracket, Heater Cable, Power Cable, Feeding Tube

Tube type...TAL-*,*~**Y

Solder wire Diameter | Tube total length


DRC-1300

For SLV

Drill Cleaner

The rotating drill bit removes the dross inside the sleeve.

Specifications	
Type	DRC-1300
Dimensions	91.5mm (W) x 130mm (D) x 120.7mm (H)
Rotation Speed	Approx. 8000rpm
Power Source	24V DC (30mA)
Drill Diameter	φ1.1 / φ1.3 / φ1.5 (Choose one)
Weight	Approx. 1.7kg
Accessories	Drill bit 1 piece

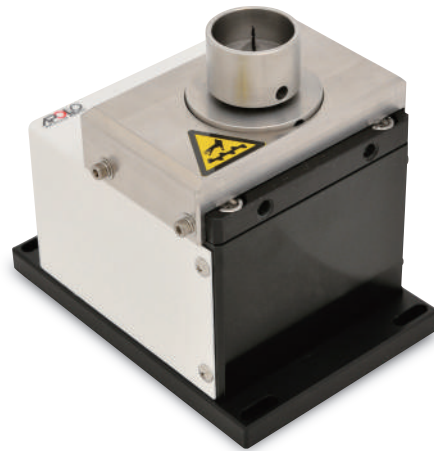

CCH-700

For SLV

Cleaning Heater

This cleaner heats the ceramic sleeve and burns out the dross inside.

Specifications	
Type	CCH-700
Dimensions	91.5mm (W) x 130mm (D) x 120.7mm (H)
Rotation Speed	Approx. 8000rpm
Power Source	24V DC (30mA)
Drill Diameter	φ1.1 / φ1.3 / φ1.5 (Choose one)
Weight	Approx. 1.7kg
Accessories	Drill bit 1 piece



High Quality Lead Free Solder Wire For Robotic Soldering

We offer a high-quality flux cored solder wire for use with our automated soldering equipment.

Flux spatter is reduced and initial wettability has been improved.



Available in various solder diameter.

Type:	ASW96535S	ASW96535K	ASW98307K
Suitableness	Iron Soldering	Sleeve Soldering	Silver-less
Alloy Compositions	96.5Sn3Ag0.5Cu	96.5Sn3Ag0.5Cu	Sn-0.7Cu
Melting Point	217-220°C	220°C	227-230°C
Flux Characteristic	Excellent initial wettability	High-temperature resistant	Excellent initial wettability
Flux Content	4%	4%	4%

Solder Wire Feeding Tubes

The flexible double layer solder feed tube provides for smooth and precise feeding of solder wire. Please specify the optimal tube set for the robot unit along with the solder wire diameter and point/slide soldering.



Configuration: **TAL** **1.0** — **650** **S60**

Eg) Point soldering feeding tube
Solder Wire Diameter: 1.0mm
Total length:650mm

Solder Wire Diameter

Tube Type

TAL		L-CAT NEO L-CAT EVO J-CAT Series JS SCARA Series TERRA-SP LUNA-LCO / LSP YPH-10 (SSA)
TR		SSA
TU		SSB
TZB		ZSB-10/16

Nozzle Type

S60		For Point Soldering, SSA (Solder Diameter Φ 0.3 - 1.2mm)
		For Point Soldering, SSA (Solder Diameter Φ 1.4 - 2.0mm)
S90		For Slide Soldering, SSA (Solder Diameter Φ 0.3 - 1.2mm)
		For Slide Soldering, SSA (Solder Diameter Φ 1.4 - 2.0mm)
N55		Needle Type*
Y	No nozzle	For YPH-10
L		For SSB PM-L Iron Unit (Pencil)
S		For SSB PM-S Iron Unit (Pencil)
V		For SSB AM Iron Unit (Hand Gun)
S120		For ZSB-10/16, SSA
H120		For ZSB-10/16

Tube Total Length

The requested length can be fabricated.
Recommended Length is as follows:

Model	Point Soldering	Slide Soldering
L-CAT NEO	650mm	780mm
L-CAT EVO	450mm	600mm
J-CAT200 Series	650mm	780mm
J-CAT300 Series	750mm	880mm
J-CAT400 Series	750mm	880mm
TERRA-SP LUNA-LCO / -LSP	1500mm	
SSA	1500mm	
SSB	1500mm	
ZSB-10/16	700mm	



For KTU tube set, please order the following three parts.

TAL * . * - * * * (Tube)

KTU-HOL(Needle Holder)

KTU-N * . * (Needle)

Solder Wire Diameter



*N55 Needle Size: N55-N * *




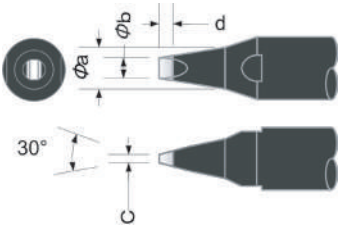
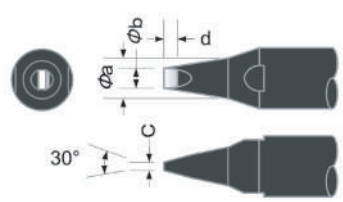

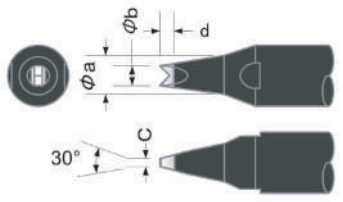

Solder Wire Diameter






Iron Cartridge

Many types of iron cartridges are available with varying heater types & overall length

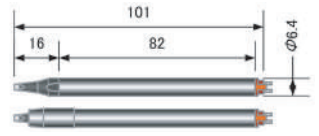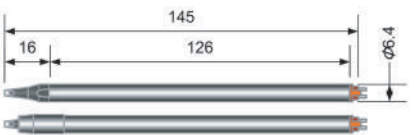DCS: DC48V: Total length 101mm DCM: DC48V: Total length 145mm
 TS: AC100V: Total length 101mm TM: AC100V: Total length 145mm
 DCN: DC48V: Total length 101mm with nitrogen sleeve

Configuration: Type - "Size & Tip" shape
 (Eg: DS-08PAD03-E08)

<p>TS/DS/DN (Old Type : TS/DCS/DCN) Cartridge</p>  <p>TM/DM (Old Type : TM/DCM) Cartridge</p> 	<p>PAD/PDS (Old Type : D) </p>  <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d All</th> </tr> </thead> <tbody> <tr><td>** -08PAD03-E08</td><td>3</td><td>0.8</td><td>0.3</td><td>0.8</td></tr> <tr><td>** -10PAD03-E08</td><td>3</td><td>1.0</td><td>0.3</td><td>0.8</td></tr> <tr><td>** -13PAD05-E15</td><td>4</td><td>1.3</td><td>0.5</td><td>1.5</td></tr> <tr><td>** -16PAD06-E15</td><td>4</td><td>1.6</td><td>0.6</td><td>1.5</td></tr> <tr><td>** -20PAD07-E15</td><td>4</td><td>2.0</td><td>0.7</td><td>1.5</td></tr> <tr><td>** -24PAD08-E15</td><td>4</td><td>2.4</td><td>0.8</td><td>1.5</td></tr> <tr><td>** -30PAD10-E30</td><td>5</td><td>3.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -40PAD10-E30</td><td>5</td><td>4.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -50PDS-E40</td><td>5</td><td>5.0</td><td>1.3</td><td>4.0</td></tr> <tr><td>** -60PDS-E40</td><td>6</td><td>6.0</td><td>1.3</td><td>4.0</td></tr> <tr><td>** -80PDS-E50</td><td>8</td><td>8.0</td><td>1.6</td><td>5.0</td></tr> </tbody> </table>		a(mm)	b	c	d All	** -08PAD03-E08	3	0.8	0.3	0.8	** -10PAD03-E08	3	1.0	0.3	0.8	** -13PAD05-E15	4	1.3	0.5	1.5	** -16PAD06-E15	4	1.6	0.6	1.5	** -20PAD07-E15	4	2.0	0.7	1.5	** -24PAD08-E15	4	2.4	0.8	1.5	** -30PAD10-E30	5	3.0	1.0	3.0	** -40PAD10-E30	5	4.0	1.0	3.0	** -50PDS-E40	5	5.0	1.3	4.0	** -60PDS-E40	6	6.0	1.3	4.0	** -80PDS-E50	8	8.0	1.6	5.0
	a(mm)	b	c	d All																																																									
** -08PAD03-E08	3	0.8	0.3	0.8																																																									
** -10PAD03-E08	3	1.0	0.3	0.8																																																									
** -13PAD05-E15	4	1.3	0.5	1.5																																																									
** -16PAD06-E15	4	1.6	0.6	1.5																																																									
** -20PAD07-E15	4	2.0	0.7	1.5																																																									
** -24PAD08-E15	4	2.4	0.8	1.5																																																									
** -30PAD10-E30	5	3.0	1.0	3.0																																																									
** -40PAD10-E30	5	4.0	1.0	3.0																																																									
** -50PDS-E40	5	5.0	1.3	4.0																																																									
** -60PDS-E40	6	6.0	1.3	4.0																																																									
** -80PDS-E50	8	8.0	1.6	5.0																																																									
	<p>PAD/PDS (Old Type : D-2) </p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d2</th> </tr> </thead> <tbody> <tr><td>** -08PAD03-B08</td><td>3</td><td>0.8</td><td>0.3</td><td>0.8</td></tr> <tr><td>** -10PAD03-B08</td><td>3</td><td>1.0</td><td>0.3</td><td>0.8</td></tr> <tr><td>** -13PAD05-B15</td><td>4</td><td>1.3</td><td>0.5</td><td>1.5</td></tr> <tr><td>** -16PAD06-B15</td><td>4</td><td>1.6</td><td>0.6</td><td>1.5</td></tr> <tr><td>** -20PAD07-B15</td><td>4</td><td>2.0</td><td>0.7</td><td>1.5</td></tr> <tr><td>** -24PAD08-B15</td><td>4</td><td>2.4</td><td>0.8</td><td>1.5</td></tr> <tr><td>** -30PAD10-B30</td><td>5</td><td>3.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -40PAD10-B30</td><td>5</td><td>4.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -50PDS-B40</td><td>5</td><td>5.0</td><td>1.3</td><td>4.0</td></tr> <tr><td>** -60PDS-B40</td><td>6</td><td>6.0</td><td>1.3</td><td>4.0</td></tr> <tr><td>** -80PDS-B50</td><td>8</td><td>8.0</td><td>1.6</td><td>5.0</td></tr> </tbody> </table>		a(mm)	b	c	d2	** -08PAD03-B08	3	0.8	0.3	0.8	** -10PAD03-B08	3	1.0	0.3	0.8	** -13PAD05-B15	4	1.3	0.5	1.5	** -16PAD06-B15	4	1.6	0.6	1.5	** -20PAD07-B15	4	2.0	0.7	1.5	** -24PAD08-B15	4	2.4	0.8	1.5	** -30PAD10-B30	5	3.0	1.0	3.0	** -40PAD10-B30	5	4.0	1.0	3.0	** -50PDS-B40	5	5.0	1.3	4.0	** -60PDS-B40	6	6.0	1.3	4.0	** -80PDS-B50	8	8.0	1.6	5.0
	a(mm)	b	c	d2																																																									
** -08PAD03-B08	3	0.8	0.3	0.8																																																									
** -10PAD03-B08	3	1.0	0.3	0.8																																																									
** -13PAD05-B15	4	1.3	0.5	1.5																																																									
** -16PAD06-B15	4	1.6	0.6	1.5																																																									
** -20PAD07-B15	4	2.0	0.7	1.5																																																									
** -24PAD08-B15	4	2.4	0.8	1.5																																																									
** -30PAD10-B30	5	3.0	1.0	3.0																																																									
** -40PAD10-B30	5	4.0	1.0	3.0																																																									
** -50PDS-B40	5	5.0	1.3	4.0																																																									
** -60PDS-B40	6	6.0	1.3	4.0																																																									
** -80PDS-B50	8	8.0	1.6	5.0																																																									
	<p>PDZ (Old Type : DV2) </p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d All</th> </tr> </thead> <tbody> <tr><td>** -13PDZ08-EZ15</td><td>4</td><td>1.3</td><td>0.5</td><td>1.5</td></tr> <tr><td>** -16PDZ12-EZ15</td><td>4</td><td>1.6</td><td>0.6</td><td>1.5</td></tr> <tr><td>** -20PDZ14-EZ15</td><td>4</td><td>2.0</td><td>0.6</td><td>1.5</td></tr> <tr><td>** -24PDZ16-EZ15</td><td>4</td><td>2.4</td><td>0.8</td><td>1.5</td></tr> <tr><td>** -30PDZ20-EZ30</td><td>5</td><td>3.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -40PDZ24-EZ30</td><td>5</td><td>4.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -50PDZ35-EZ40</td><td>5</td><td>5.0</td><td>1.3</td><td>4.0</td></tr> </tbody> </table>		a(mm)	b	c	d All	** -13PDZ08-EZ15	4	1.3	0.5	1.5	** -16PDZ12-EZ15	4	1.6	0.6	1.5	** -20PDZ14-EZ15	4	2.0	0.6	1.5	** -24PDZ16-EZ15	4	2.4	0.8	1.5	** -30PDZ20-EZ30	5	3.0	1.0	3.0	** -40PDZ24-EZ30	5	4.0	1.0	3.0	** -50PDZ35-EZ40	5	5.0	1.3	4.0																				
	a(mm)	b	c	d All																																																									
** -13PDZ08-EZ15	4	1.3	0.5	1.5																																																									
** -16PDZ12-EZ15	4	1.6	0.6	1.5																																																									
** -20PDZ14-EZ15	4	2.0	0.6	1.5																																																									
** -24PDZ16-EZ15	4	2.4	0.8	1.5																																																									
** -30PDZ20-EZ30	5	3.0	1.0	3.0																																																									
** -40PDZ24-EZ30	5	4.0	1.0	3.0																																																									
** -50PDZ35-EZ40	5	5.0	1.3	4.0																																																									

	<p>GDV (Old Type : DV1)</p>  <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d All</th> </tr> </thead> <tbody> <tr><td>** -10GDV07-EZ10</td><td>3</td><td>1.0</td><td>0.4</td><td>1.0</td></tr> <tr><td>** -13GDV08-EZ15</td><td>4</td><td>1.3</td><td>0.5</td><td>1.5</td></tr> <tr><td>** -16GDV10-EZ15</td><td>4</td><td>1.6</td><td>0.6</td><td>1.5</td></tr> <tr><td>** -20GDV14-EZ15</td><td>4</td><td>2.0</td><td>0.8</td><td>1.5</td></tr> <tr><td>** -24GDV14-EZ15</td><td>4</td><td>2.4</td><td>0.8</td><td>1.5</td></tr> <tr><td>** -30GDV17-EZ30</td><td>5</td><td>3.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -40GDV17-EZ30</td><td>5</td><td>4.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -50GDV17-EZ40</td><td>5</td><td>5.0</td><td>1.3</td><td>4.0</td></tr> <tr><td>** -60GDV23-EZ40</td><td>6</td><td>6.0</td><td>1.3</td><td>4.0</td></tr> </tbody> </table>		a(mm)	b	c	d All	** -10GDV07-EZ10	3	1.0	0.4	1.0	** -13GDV08-EZ15	4	1.3	0.5	1.5	** -16GDV10-EZ15	4	1.6	0.6	1.5	** -20GDV14-EZ15	4	2.0	0.8	1.5	** -24GDV14-EZ15	4	2.4	0.8	1.5	** -30GDV17-EZ30	5	3.0	1.0	3.0	** -40GDV17-EZ30	5	4.0	1.0	3.0	** -50GDV17-EZ40	5	5.0	1.3	4.0	** -60GDV23-EZ40	6	6.0	1.3	4.0					
	a(mm)	b	c	d All																																																				
** -10GDV07-EZ10	3	1.0	0.4	1.0																																																				
** -13GDV08-EZ15	4	1.3	0.5	1.5																																																				
** -16GDV10-EZ15	4	1.6	0.6	1.5																																																				
** -20GDV14-EZ15	4	2.0	0.8	1.5																																																				
** -24GDV14-EZ15	4	2.4	0.8	1.5																																																				
** -30GDV17-EZ30	5	3.0	1.0	3.0																																																				
** -40GDV17-EZ30	5	4.0	1.0	3.0																																																				
** -50GDV17-EZ40	5	5.0	1.3	4.0																																																				
** -60GDV23-EZ40	6	6.0	1.3	4.0																																																				
	<p>GDV (Old Type : DV1-2)</p>  <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d2</th> </tr> </thead> <tbody> <tr><td>** -10GDV07-BZ10</td><td>3</td><td>1.0</td><td>0.4</td><td>1.0</td></tr> <tr><td>** -13GDV08-BZ15</td><td>4</td><td>1.3</td><td>0.5</td><td>1.5</td></tr> <tr><td>** -16GDV10-BZ15</td><td>4</td><td>1.6</td><td>0.6</td><td>1.5</td></tr> <tr><td>** -20GDV14-BZ15</td><td>4</td><td>2.0</td><td>0.8</td><td>1.5</td></tr> <tr><td>** -24GDV14-BZ15</td><td>4</td><td>2.4</td><td>0.8</td><td>1.5</td></tr> <tr><td>** -30GDV17-BZ30</td><td>5</td><td>3.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -40GDV17-BZ30</td><td>5</td><td>4.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -50GDV17-BZ40</td><td>5</td><td>5.0</td><td>1.3</td><td>4.0</td></tr> <tr><td>** -60GDV23-BZ40</td><td>6</td><td>6.0</td><td>1.3</td><td>4.0</td></tr> <tr><td>** -80GDV52-BZ50</td><td>8</td><td>8.0</td><td>1.6</td><td>5.0^{V溝 150°}</td></tr> </tbody> </table>		a(mm)	b	c	d2	** -10GDV07-BZ10	3	1.0	0.4	1.0	** -13GDV08-BZ15	4	1.3	0.5	1.5	** -16GDV10-BZ15	4	1.6	0.6	1.5	** -20GDV14-BZ15	4	2.0	0.8	1.5	** -24GDV14-BZ15	4	2.4	0.8	1.5	** -30GDV17-BZ30	5	3.0	1.0	3.0	** -40GDV17-BZ30	5	4.0	1.0	3.0	** -50GDV17-BZ40	5	5.0	1.3	4.0	** -60GDV23-BZ40	6	6.0	1.3	4.0	** -80GDV52-BZ50	8	8.0	1.6	5.0 ^{V溝 150°}
	a(mm)	b	c	d2																																																				
** -10GDV07-BZ10	3	1.0	0.4	1.0																																																				
** -13GDV08-BZ15	4	1.3	0.5	1.5																																																				
** -16GDV10-BZ15	4	1.6	0.6	1.5																																																				
** -20GDV14-BZ15	4	2.0	0.8	1.5																																																				
** -24GDV14-BZ15	4	2.4	0.8	1.5																																																				
** -30GDV17-BZ30	5	3.0	1.0	3.0																																																				
** -40GDV17-BZ30	5	4.0	1.0	3.0																																																				
** -50GDV17-BZ40	5	5.0	1.3	4.0																																																				
** -60GDV23-BZ40	6	6.0	1.3	4.0																																																				
** -80GDV52-BZ50	8	8.0	1.6	5.0 ^{V溝 150°}																																																				
	<p>GAV (Old Type : BCV1)</p>  <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d All</th> </tr> </thead> <tbody> <tr><td>** -20GAV14-EZ15</td><td>4</td><td>2.0</td><td>0.6</td><td>1.5</td></tr> <tr><td>** -24GAV17-EZ20</td><td>4</td><td>2.4</td><td>0.8</td><td>2.0</td></tr> <tr><td>** -30GAV21-EZ30</td><td>5</td><td>3.0</td><td>1.0</td><td>3.0</td></tr> <tr><td>** -40GAV28-EZ30</td><td>5</td><td>4.0</td><td>1.0</td><td>3.0</td></tr> </tbody> </table>		a(mm)	b	c	d All	** -20GAV14-EZ15	4	2.0	0.6	1.5	** -24GAV17-EZ20	4	2.4	0.8	2.0	** -30GAV21-EZ30	5	3.0	1.0	3.0	** -40GAV28-EZ30	5	4.0	1.0	3.0																														
	a(mm)	b	c	d All																																																				
** -20GAV14-EZ15	4	2.0	0.6	1.5																																																				
** -24GAV17-EZ20	4	2.4	0.8	2.0																																																				
** -30GAV21-EZ30	5	3.0	1.0	3.0																																																				
** -40GAV28-EZ30	5	4.0	1.0	3.0																																																				
	<p>PCA/PCS (Old Type : PC)</p>  <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d2</th> </tr> </thead> <tbody> <tr><td>** -10PCA-B</td><td>3</td><td>1.0</td><td>—</td><td>—</td></tr> <tr><td>** -13PCA-B</td><td>4</td><td>1.3</td><td>—</td><td>—</td></tr> <tr><td>** -16PCA-B</td><td>4</td><td>1.6</td><td>—</td><td>—</td></tr> <tr><td>** -20PCA-B</td><td>4</td><td>2.0</td><td>—</td><td>—</td></tr> <tr><td>** -24PCA-B</td><td>4</td><td>2.4</td><td>—</td><td>—</td></tr> <tr><td>** -30PCA-B</td><td>5</td><td>3.0</td><td>—</td><td>—</td></tr> <tr><td>** -40PCA-B</td><td>5</td><td>4.0</td><td>—</td><td>—</td></tr> <tr><td>** -50PCS-B</td><td>5</td><td>5.0</td><td>—</td><td>—</td></tr> <tr><td>** -60PCS-B</td><td>6</td><td>6.0</td><td>—</td><td>—</td></tr> <tr><td>** -80PCS-B</td><td>8</td><td>8.0</td><td>—</td><td>—</td></tr> </tbody> </table>		a(mm)	b	c	d2	** -10PCA-B	3	1.0	—	—	** -13PCA-B	4	1.3	—	—	** -16PCA-B	4	1.6	—	—	** -20PCA-B	4	2.0	—	—	** -24PCA-B	4	2.4	—	—	** -30PCA-B	5	3.0	—	—	** -40PCA-B	5	4.0	—	—	** -50PCS-B	5	5.0	—	—	** -60PCS-B	6	6.0	—	—	** -80PCS-B	8	8.0	—	—
	a(mm)	b	c	d2																																																				
** -10PCA-B	3	1.0	—	—																																																				
** -13PCA-B	4	1.3	—	—																																																				
** -16PCA-B	4	1.6	—	—																																																				
** -20PCA-B	4	2.0	—	—																																																				
** -24PCA-B	4	2.4	—	—																																																				
** -30PCA-B	5	3.0	—	—																																																				
** -40PCA-B	5	4.0	—	—																																																				
** -50PCS-B	5	5.0	—	—																																																				
** -60PCS-B	6	6.0	—	—																																																				
** -80PCS-B	8	8.0	—	—																																																				
	<p>PCZ (Old Type : PCV2)</p>  <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d2</th> </tr> </thead> <tbody> <tr><td>** -20PCZ10-BZ</td><td>4</td><td>2.0</td><td>—</td><td>—</td></tr> <tr><td>** -24PCZ12-BZ</td><td>4</td><td>2.4</td><td>—</td><td>—</td></tr> <tr><td>** -30PCZ14-BZ</td><td>5</td><td>3.0</td><td>—</td><td>—</td></tr> <tr><td>** -40PCZ16-BZ</td><td>5</td><td>4.0</td><td>—</td><td>—</td></tr> <tr><td>** -50PCZ24-BZ</td><td>5</td><td>5.0</td><td>—</td><td>—</td></tr> </tbody> </table>		a(mm)	b	c	d2	** -20PCZ10-BZ	4	2.0	—	—	** -24PCZ12-BZ	4	2.4	—	—	** -30PCZ14-BZ	5	3.0	—	—	** -40PCZ16-BZ	5	4.0	—	—	** -50PCZ24-BZ	5	5.0	—	—																									
	a(mm)	b	c	d2																																																				
** -20PCZ10-BZ	4	2.0	—	—																																																				
** -24PCZ12-BZ	4	2.4	—	—																																																				
** -30PCZ14-BZ	5	3.0	—	—																																																				
** -40PCZ16-BZ	5	4.0	—	—																																																				
** -50PCZ24-BZ	5	5.0	—	—																																																				

Iron Cartridge

Slide Soldering Iron Cartridge

<p>TS/DS/DN (Old Type : TS/DCS/DCN) Cartridge</p>																																				
<p>TM/DM (Old Type : TM/DCM) Cartridge</p>																																				
	<p>KAA (Old Type : FPR)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>—</th> </tr> </thead> <tbody> <tr> <td>* *-16KAA45-B</td> <td>6.0</td> <td>3.4</td> <td>1.6</td> <td>—</td> </tr> <tr> <td>* *-20KAA45-B</td> <td>6.0</td> <td>3.4</td> <td>2.0</td> <td>—</td> </tr> <tr> <td>* *-24KAA45-B</td> <td>6.0</td> <td>4.0</td> <td>2.4</td> <td>—</td> </tr> <tr> <td>* *-30KAA45-B</td> <td>6.0</td> <td>4.5</td> <td>3.0</td> <td>—</td> </tr> <tr> <td>* *-40KAA45-B</td> <td>6.0</td> <td>5.5</td> <td>4.0</td> <td>—</td> </tr> <tr> <td>* *-50K45AS-A</td> <td>6.0</td> <td>6.0</td> <td>5.0</td> <td>—</td> </tr> </tbody> </table>		a(mm)	b	c	—	* *-16KAA45-B	6.0	3.4	1.6	—	* *-20KAA45-B	6.0	3.4	2.0	—	* *-24KAA45-B	6.0	4.0	2.4	—	* *-30KAA45-B	6.0	4.5	3.0	—	* *-40KAA45-B	6.0	5.5	4.0	—	* *-50K45AS-A	6.0	6.0	5.0	—
	a(mm)	b	c	—																																
* *-16KAA45-B	6.0	3.4	1.6	—																																
* *-20KAA45-B	6.0	3.4	2.0	—																																
* *-24KAA45-B	6.0	4.0	2.4	—																																
* *-30KAA45-B	6.0	4.5	3.0	—																																
* *-40KAA45-B	6.0	5.5	4.0	—																																
* *-50K45AS-A	6.0	6.0	5.0	—																																
	<p>RDD (Old Type : R)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* *-20RDD-B20</td> <td>2.0</td> <td>2.0</td> <td>0.6</td> <td>6.0</td> </tr> <tr> <td>* *-24RDD-B20</td> <td>2.4</td> <td>2.4</td> <td>0.6</td> <td>6.0</td> </tr> <tr> <td>* *-30RDD-B20</td> <td>3.0</td> <td>3.0</td> <td>0.6</td> <td>6.4</td> </tr> <tr> <td>* *-40RDD-B20</td> <td>4.0</td> <td>4.0</td> <td>0.9</td> <td>7.0</td> </tr> <tr> <td>* *-50RDD-B20</td> <td>5.0</td> <td>5.0</td> <td>1.3</td> <td>8.0</td> </tr> </tbody> </table>		a(mm)	b	c	d	* *-20RDD-B20	2.0	2.0	0.6	6.0	* *-24RDD-B20	2.4	2.4	0.6	6.0	* *-30RDD-B20	3.0	3.0	0.6	6.4	* *-40RDD-B20	4.0	4.0	0.9	7.0	* *-50RDD-B20	5.0	5.0	1.3	8.0					
	a(mm)	b	c	d																																
* *-20RDD-B20	2.0	2.0	0.6	6.0																																
* *-24RDD-B20	2.4	2.4	0.6	6.0																																
* *-30RDD-B20	3.0	3.0	0.6	6.4																																
* *-40RDD-B20	4.0	4.0	0.9	7.0																																
* *-50RDD-B20	5.0	5.0	1.3	8.0																																

UP Type Iron Cartridge

<p>TS/DS/DN (Old Type : TS/DCS/DCN) Cartridge</p>																															
	<p>PAH (Old Type : UP)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* *-14PAH08-F-AZ</td> <td>1.4</td> <td>0.8</td> <td>1.6</td> <td>7.5</td> </tr> <tr> <td>* *-20PAH13-F-AZ</td> <td>2.0</td> <td>1.3</td> <td>2.5</td> <td>9.0</td> </tr> <tr> <td>* *-26PAH18-F-AZ</td> <td>2.6</td> <td>1.8</td> <td>2.5</td> <td>10.9</td> </tr> <tr> <td>* *-32PAH22-F-AZ</td> <td>3.2</td> <td>2.2</td> <td>3.0</td> <td>10.9</td> </tr> <tr> <td>* *-40PAH30-F-AZ</td> <td>4.0</td> <td>3.0</td> <td>3.0</td> <td>13.5</td> </tr> </tbody> </table>		a(mm)	b	c	d	* *-14PAH08-F-AZ	1.4	0.8	1.6	7.5	* *-20PAH13-F-AZ	2.0	1.3	2.5	9.0	* *-26PAH18-F-AZ	2.6	1.8	2.5	10.9	* *-32PAH22-F-AZ	3.2	2.2	3.0	10.9	* *-40PAH30-F-AZ	4.0	3.0	3.0	13.5
	a(mm)	b	c	d																											
* *-14PAH08-F-AZ	1.4	0.8	1.6	7.5																											
* *-20PAH13-F-AZ	2.0	1.3	2.5	9.0																											
* *-26PAH18-F-AZ	2.6	1.8	2.5	10.9																											
* *-32PAH22-F-AZ	3.2	2.2	3.0	10.9																											
* *-40PAH30-F-AZ	4.0	3.0	3.0	13.5																											
	<p>PSW (Old Type : UPL)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* *-16PSW08-F-AZ</td> <td>1.6</td> <td>0.8</td> <td>2.5</td> <td>3.0</td> </tr> <tr> <td>* *-22PSW11-F-AZ</td> <td>2.2</td> <td>1.1</td> <td>2.5</td> <td>4.0</td> </tr> <tr> <td>* *-30PSW15-F-AZ</td> <td>3.0</td> <td>1.5</td> <td>3.0</td> <td>4.0</td> </tr> </tbody> </table>		a(mm)	b	c	d	* *-16PSW08-F-AZ	1.6	0.8	2.5	3.0	* *-22PSW11-F-AZ	2.2	1.1	2.5	4.0	* *-30PSW15-F-AZ	3.0	1.5	3.0	4.0										
	a(mm)	b	c	d																											
* *-16PSW08-F-AZ	1.6	0.8	2.5	3.0																											
* *-22PSW11-F-AZ	2.2	1.1	2.5	4.0																											
* *-30PSW15-F-AZ	3.0	1.5	3.0	4.0																											

Heat Storage Type Iron Cartridge

<p>TB/SB (Old Type : TSB/DCSB) Cartridge</p> <p>MB/DB (Old Type : TMB/DCNB) Cartridge</p>																																				
	<p>PAD (Old Type : B-D-2)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* B-16PAD06-B20</td> <td>7</td> <td>1.6</td> <td>0.6</td> <td>1.0</td> </tr> <tr> <td>* B-20PAD07-B20</td> <td>7</td> <td>2.0</td> <td>0.7</td> <td>2.0</td> </tr> <tr> <td>* B-24PAD08-B20</td> <td>7</td> <td>2.4</td> <td>0.8</td> <td>2.0</td> </tr> <tr> <td>* B-30PAD10-B30</td> <td>8</td> <td>3.0</td> <td>1.0</td> <td>3.0</td> </tr> <tr> <td>* B-40PAD10-B30</td> <td>8</td> <td>4.0</td> <td>1.0</td> <td>3.0</td> </tr> <tr> <td>* B-50PAD10-B30</td> <td>8</td> <td>5.0</td> <td>1.0</td> <td>3.0</td> </tr> </tbody> </table>		a(mm)	b	c	d	* B-16PAD06-B20	7	1.6	0.6	1.0	* B-20PAD07-B20	7	2.0	0.7	2.0	* B-24PAD08-B20	7	2.4	0.8	2.0	* B-30PAD10-B30	8	3.0	1.0	3.0	* B-40PAD10-B30	8	4.0	1.0	3.0	* B-50PAD10-B30	8	5.0	1.0	3.0
	a(mm)	b	c	d																																
* B-16PAD06-B20	7	1.6	0.6	1.0																																
* B-20PAD07-B20	7	2.0	0.7	2.0																																
* B-24PAD08-B20	7	2.4	0.8	2.0																																
* B-30PAD10-B30	8	3.0	1.0	3.0																																
* B-40PAD10-B30	8	4.0	1.0	3.0																																
* B-50PAD10-B30	8	5.0	1.0	3.0																																
	<p>GDV (Old Type : B-DV1-2)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* B-16GDV10-BZ20</td> <td>7</td> <td>1.6</td> <td>0.5</td> <td>2.5</td> </tr> <tr> <td>* B-20GDV12-BZ20</td> <td>7</td> <td>2.0</td> <td>0.6</td> <td>3.0</td> </tr> <tr> <td>* B-24GDV14-BZ20</td> <td>7</td> <td>2.4</td> <td>0.8</td> <td>3.0</td> </tr> <tr> <td>* B-30GDV17-BZ30</td> <td>8</td> <td>3.0</td> <td>1.0</td> <td>3.0</td> </tr> <tr> <td>* B-40GDV17-BZ30</td> <td>8</td> <td>4.0</td> <td>1.0</td> <td>3.0</td> </tr> <tr> <td>* B-50GDV23-BZ30</td> <td>8</td> <td>5.0</td> <td>1.2</td> <td>3.0</td> </tr> </tbody> </table>		a(mm)	b	c	d	* B-16GDV10-BZ20	7	1.6	0.5	2.5	* B-20GDV12-BZ20	7	2.0	0.6	3.0	* B-24GDV14-BZ20	7	2.4	0.8	3.0	* B-30GDV17-BZ30	8	3.0	1.0	3.0	* B-40GDV17-BZ30	8	4.0	1.0	3.0	* B-50GDV23-BZ30	8	5.0	1.2	3.0
	a(mm)	b	c	d																																
* B-16GDV10-BZ20	7	1.6	0.5	2.5																																
* B-20GDV12-BZ20	7	2.0	0.6	3.0																																
* B-24GDV14-BZ20	7	2.4	0.8	3.0																																
* B-30GDV17-BZ30	8	3.0	1.0	3.0																																
* B-40GDV17-BZ30	8	4.0	1.0	3.0																																
* B-50GDV23-BZ30	8	5.0	1.2	3.0																																
	<p>PCA (Old Type : B-PC)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* B-24PCA-B</td> <td>8</td> <td>2.4</td> <td>—</td> <td>—</td> </tr> <tr> <td>* B-30PCA-B</td> <td>8</td> <td>3.0</td> <td>—</td> <td>—</td> </tr> <tr> <td>* B-40PCA-B</td> <td>8</td> <td>4.0</td> <td>—</td> <td>—</td> </tr> </tbody> </table>		a(mm)	b	c	d	* B-24PCA-B	8	2.4	—	—	* B-30PCA-B	8	3.0	—	—	* B-40PCA-B	8	4.0	—	—															
	a(mm)	b	c	d																																
* B-24PCA-B	8	2.4	—	—																																
* B-30PCA-B	8	3.0	—	—																																
* B-40PCA-B	8	4.0	—	—																																
	<p>KAA (Old Type : B-FPR)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* B-16KAA45-B10</td> <td>8</td> <td>3.4</td> <td>1.6</td> <td>—</td> </tr> <tr> <td>* B-24KAA45-B10</td> <td>8</td> <td>4.0</td> <td>2.4</td> <td>—</td> </tr> <tr> <td>* B-30KAA45-B10</td> <td>8</td> <td>4.5</td> <td>3.0</td> <td>—</td> </tr> <tr> <td>* B-40KAA45-B10</td> <td>8</td> <td>5.5</td> <td>4.0</td> <td>—</td> </tr> </tbody> </table>		a(mm)	b	c	d	* B-16KAA45-B10	8	3.4	1.6	—	* B-24KAA45-B10	8	4.0	2.4	—	* B-30KAA45-B10	8	4.5	3.0	—	* B-40KAA45-B10	8	5.5	4.0	—										
	a(mm)	b	c	d																																
* B-16KAA45-B10	8	3.4	1.6	—																																
* B-24KAA45-B10	8	4.0	2.4	—																																
* B-30KAA45-B10	8	4.5	3.0	—																																
* B-40KAA45-B10	8	5.5	4.0	—																																
	<p>RDD (Old Type : B-R)</p> <table border="1"> <thead> <tr> <th></th> <th>a(mm)</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>* B-30RDD-B15</td> <td>8</td> <td>3.0</td> <td>0.6</td> <td>1.5</td> </tr> <tr> <td>* B-40RDD-B20</td> <td>8</td> <td>4.0</td> <td>0.9</td> <td>2.0</td> </tr> <tr> <td>* B-50RDD-B25</td> <td>8</td> <td>5.0</td> <td>1.3</td> <td>2.5</td> </tr> </tbody> </table>		a(mm)	b	c	d	* B-30RDD-B15	8	3.0	0.6	1.5	* B-40RDD-B20	8	4.0	0.9	2.0	* B-50RDD-B25	8	5.0	1.3	2.5															
	a(mm)	b	c	d																																
* B-30RDD-B15	8	3.0	0.6	1.5																																
* B-40RDD-B20	8	4.0	0.9	2.0																																
* B-50RDD-B25	8	5.0	1.3	2.5																																

Iron Cartridge

One Touch Quick Change Iron Cartridge DX

The patented design of the one-touch quick-change DX iron is easy to change and there is no position variation after tip replacement.




Custom Made Iron Cartridge

Upon request, various custom tips can be made. Feel free to request.



Custom Made Reference

Dual Head Robot

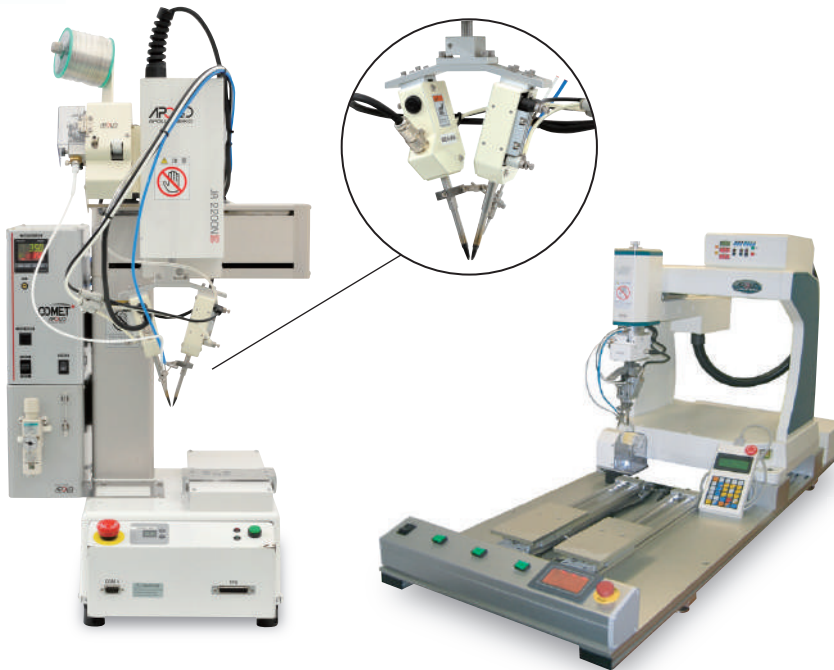


Twin Shuttle Soldering Robot



Dual Iron Unit Soldering Robot



LED Soldering System with Triple Parts Feeders

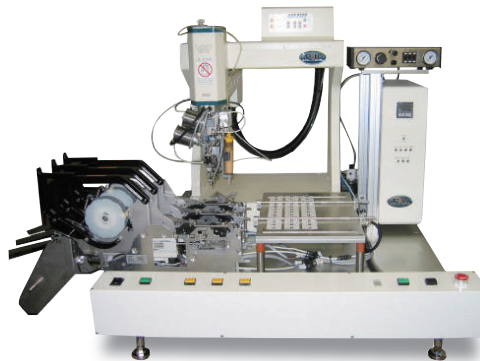

Multi Iron Unit Soldering System



Company Profile

Apollo Seiko Ltd.

Registered Date : October 1, 1969

Head Office & Factory

ISO 14001 Certificated



2271-7 Jinba, Gotenba-Shi, Shizuoka, Japan 412-0047

TEL:0550-88-2828 FAX:0550-88-2830

HomePage:www.apolloseiko.co.jp/

E-Mail:sales@apolloseiko.co.jp

Tokyo Branch

101, 5-31-2 Aoto, Katsusika-Ku, Tokyo, Japan 146-0082

TEL:03-5650-3124 FAX:03-5650-3125

E-Mail:sales@apolloseiko.co.jp

Osaka Branch

1-4-31 HKC Tanimachi Build. 1F, Noninbashi, Chuo-ku, Osaka, Japan 540-0011

TEL: 06-6809-3601 FAX: 06-6809-3609

E-Mail: sales@apolloseiko.co.jp

Nagoya Office

1-4-18 UT Build. 3F, Shinoto, Atsuta-ku, Nagoya, Aichi, Japan 456-0018

TEL: 070-6984-5189

E-Mail: sales@apolloseiko.co.jp

Kyushu Office

4-7-12-602 Yoshizuka, Hakata-ku, Fukuoka-shi, Fukuoka, Japan 812-0041

TEL·FAX:092-409-5589

E-Mail:sales@apolloseiko.co.jp

Apollo Seiko Group Company

Unitechnology Co., Ltd.

1-4-18 UT Build. 3F, Shinoto, Atsuta-ku, Nagoya, Aichi, Japan 456-0018

TEL: 052-678-9002 FAX: 052-678-8003

E-Mail: info@unitechnology.biz



Global Network

Apollo Seiko Group -Service & Production Bases

USA, Mexico, Canada

Apollo Seiko Ltd. USA 3969 West Lemon Creek Road, PO Box 457, Bridgman, MI 49106, USA
TEL: +1-269-465-3400 FAX: +1-269-465-3441

Singapore Apollo Seiko Pte., Ltd.

Blk 30 Loyang Way #07-02, Loyang Industrial Estate, Singapore, 508769
TEL: +65-6542-9663 FAX: +65-6542-9150

China Shanghai

Apollo Seiko (Shanghai) Industry Corporation Room 1501, 15F, No.1, Wan Han Du Road, Jing An District, Shanghai, PR China
TEL: +86-21-6150-1698 FAX: +86-21-3221-2205

Apollo Seiko North China Office - Tianjin

Room 2103, 21F, Gate 2, Building Zeng 1, Lidabolan Yuan, Heiniucheng Avenue, Hexi District, Tianjin, China
TEL: +86-22-2392-8371 FAX: +86-22-2392-8372

Apollo Seiko South China Office - Guangzhou

Room 1805, 18F, B block, Jin Kouan Building #57 Fan Hua Lu Pan, Yu Qu, Guangzhou, Guangdong, China
TEL: +86-20-8483-5290 FAX: +86-20-8483-1080

Korea

Apollo Seiko Korea Co., LTD. 102-1305, Chunui Technopark, Chunui-dong, Wonmi-gu, Bucheon city, Gyeonggi-do 420-857 Korea
TEL: +82-(0)32-652-9959 FAX: +82-(0)32-52-9962

Thai

Apollo Seiko Thai (AST) Co., LTD. 61/49 Sukhumvit Road 26, Klongton, Klongtoey, Bangkok 10110 Thailand
TEL: +66-(0)2-661-3310 FAX: +66-(0)2-661-3311

Europe

Apollo Seiko Europe B.V. Marshall str., 18C, 5704CN Helmond, The Netherlands
TEL: +31 492 792 856 FAX: +31 492 430032

Distributors

Taiwan

Leader Seal Industrial Corporation No.2 Alley 11, Lane 20, Dung Li Road Ta Li Taichung Hsien, Taiwan R.O.C.
TEL: +886-4-2384-2233 FAX: +886-4-2384-2323

China

HOTBONTEC TECHNOLOGY (SHENZHEN) Ltd. corp Room 903, 905, 9F Tower B, CHINTO Technology Building, 1079 MinZhi Road, LongHua New District, ShenZhen city, Guangdong Province, China.
TEL: +86-755-2967-1618 FAX: +86-755-2967-2760

Italy

Etneo Italia Srl Via Bovio 6 - 28100 Novara, Italy
TEL: +39-0321-697-200 FAX: +39-0321-688-515

United Kingdom

Kaisertech Limited Unit 12, M3 Trade Park, Manor Way Eastleigh, Hants SO50 9LA, UK
TEL: +44-(0)23-8065-0065 FAX: +44-(0)23-8065-0060

Mexico

Repstronics Mariano Otero # 3433 int, 306 Col. Verde Valle Guadalajara Jalisco C.P. 4450 Mexico
TEL/FAX: +52-33-3122-0999

Mexico

ROSSI GIOVANNI & ASSOCIATES 7606 Boeing Dr, Suite J, El Paso, TX 79925
TEL U.S.: +1-(915) 345-9228 TEL Mex: +52-(664) 693-1988

Mexico

DIRE-C-TO 116 E. Coma PMB #156, Hidalgo, TX 78557
TEL: +52-89-9262-2662

Brazil

Meguro Instrumentos Eletronicos Ltda Rua Nilo, 251-ACLIMACAO CEP: 01533-010-SAO PAULO-SP, BRAZIL
TEL: +55-11-3284-5322 FAX: +55-11-3284-4704

Russia

Eurointech, Ltd. Office 016, Jubileynaya str. 26, Lubercy city, Moscow Region, 140011, Russia
TEL/FAX: +7-(495)-228-72-04

Poland

C.H. Erbslöh Polska Sp.z.o.o. ul. Farbiarska 69, PL 02-862 Warszawa, Polska
TEL: +48 22 8991944-46 FAX: +48 22 8991947